



Ultra-economy wall pack with traditional look.

Color: Bronze

Weight: 10.4 lbs

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Type	Constant Current	Watts	50W
120V	0.45A	Color Temp	3000K (Warm)
208V	0.24A	Color Accuracy	84 CRI
240V	0.21A	L70 Lifespan	50,000 Hours
277V	0.19A	Lumens	6,315 lm
Input Watts	51.7W	Efficacy	122.1 lm/W

### Technical Specifications

#### Compliance

**UL Listed:**

Suitable for wet locations. Suitable for mounting within 4 feet of the ground.

**DLC Listed:**

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

DLC Product Code: PL2UFGR7

#### Electrical

**Driver:**

Constant Current, Class 2, 120-277V, 50/60Hz, 120V: 0.45A, 208V: 0.24A, 240V: 0.21A, 277V: 0.19A

**THD:**

4.37% at 120V, 5.18% at 277V

**Power Factor:**

99.8% at 120V, 97% at 277V

**Photocell:**

120-277V Button photocell included. Photocell is compatible with 120V-277V.

#### Performance

**Lifespan:**

50,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

**Wattage Equivalency:**

Equivalent to 150W Metal Halide

**Other**

**Note:**

All values are typical (tolerance +/- 10%)

**Replacement:**

Replaces up to 175W Metal Halide

**5 Yr Limited Warranty:**

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

**Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

#### LED Characteristics

**LEDs:**

Long-life, high-efficiency, surface-mount LEDs

**Color Uniformity:**

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

#### Construction

**Housing:**

Die-cast aluminum

**Lens:**

Glass

**Reflector:**

Specular aluminum

**Cold Weather Starting:**

The minimum starting temperature is -40°C (-40°F)

**Maximum Ambient Temperature:**

Suitable for use in up to 40°C (104°F)

**Mounting:**

Die-cast backbox with four (4) conduit entry points and knockout pattern for junction box or direct wall mounting. Hinged door for easy re-assembly.

**Green Technology:**

Mercury and UV free. RoHS-compliant components.


## Technical Specifications (continued)

**Finish:**  
Formulated for high durability and long-lasting color

### Optical

**BUG Rating:**  
B1 U3 G2

## Dimensions

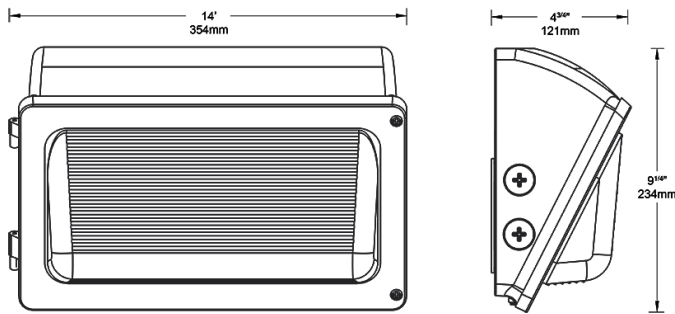

## Features

- Economy-grade wall pack with traditional look
- Covers footprint of medium-sized HID wall packs
- Available in various lumen packages
- Integrated 0-10V dimming
- 50,000-Hour LED lifespan

## Ordering Matrix

Family	Lumen Package	CRI/Color Temp	Voltage	Options
W34	55L	830		/PCU
	55L = 6,500lm, 51W 70L = 8,500lm, 69W 90L = 10,000lm, 87W	Blank = 80 CRI / 5000K 840 = 80 CRI / 4000K 830 = 80 CRI / 3000K	Blank = 120-277V, 0-10V Dimming /480 = 480V, 0-10V Dimming	Blank = No Option /PCU = 120-277V Button Photocell /MVS = Microwave Motion Sensor /LC = 120-277V Lightcloud® Controller

*All values are nominal with +/- 10% tolerance. See spec sheet for more details.*