



Ultra-economy wall pack with traditional look.

Color: Bronze

Weight: 9.9 lbs

**Project:**

**Type:**

**Prepared By:**

**Date:**

### Driver Info

Type	Constant Current
120V	0.45A
208V	0.24A
240V	0.21A
277V	0.19A
Input Watts 51.6W	

### LED Info

Watts	50W
Color Temp	4000K (Neutral)
Color Accuracy	83 CRI
L70 Lifespan	50,000 Hours
Lumens	6,577 lm
Efficacy	127.5 lm/W

## Technical Specifications

### Other

#### Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

### Electrical

#### Driver:

Constant Current, Class 2, 120-277V, 50/60Hz, 120V: 0.45A, 208V: 0.24A, 240V: 0.21A, 277V: 0.19A

#### THD:

4.37% at 120V, 5.18% at 277V

#### Power Factor:

99.8% at 120V, 97% at 277V


### Compliance

#### DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

DLC Product Code: PKVC779I

## Dimensions

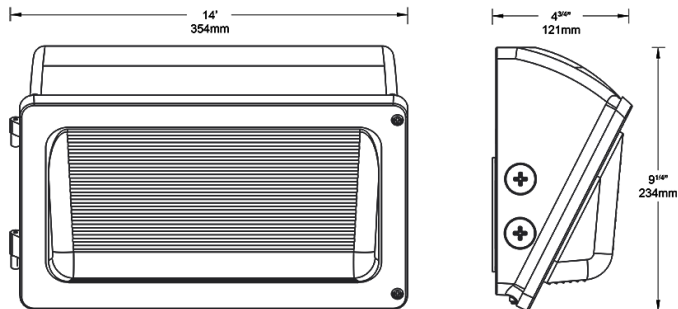

## Features

- Economy-grade wall pack with traditional look
- Covers footprint of medium-sized HID wall packs
- Available in various lumen packages
- Integrated 0-10V dimming
- 50,000-Hour LED lifespan

## Ordering Matrix

Family		Lumen Package		CRI/Color Temp	Voltage	Options
W34	-	55L	-	840		/MVS
		55L = 6,500lm, 51W 70L = 8,500lm, 69W 90L = 10,000lm, 87W		Blank = 80 CRI / 5000K 840 = 80 CRI / 4000K 830 = 80 CRI / 3000K	Blank = 120-277V, 0-10V Dimming /480 = 480V, 0-10V Dimming	Blank = No Option /PCU = 120-277V Button Photocell /MVS = Microwave Motion Sensor /LC = 120-277V Lightcloud® Controller

*All values are nominal with +/- 10% tolerance. See spec sheet for more details.*