



Ultra-economy wall pack with traditional look.

Color: Bronze

Weight: 10.9 lbs

Project:	Туре:
Prepared By:	Date:

Driver Info)	LED Info	
Туре	Constant Current	Watts	69W
120V	N/A	Color Temp	4000K (Neutral)
208V	N/A	Color Accuracy	83 CRI
240V	N/A	L70 Lifespan	50,000 Hours
277V	N/A	Lumens	8,737 lm
Input Watts	68.1W	Efficacy	128.3 lm/W

Technical Specifications

Other

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Electrical

Driver:

Constant Current, Class 2, 120-277V, 50/60Hz, 480V:

THD:

7.86% at 480V

Power Factor:


98.4% at 480V

Compliance

DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.
DLC Product Code: PBSNJ9N2



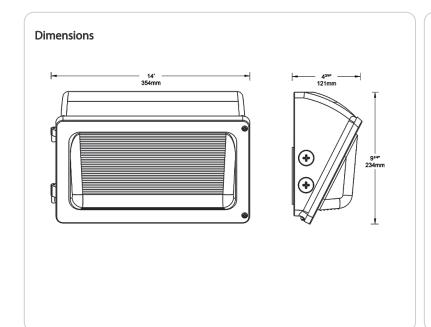

Features

Economy-grade wall pack with traditional look
Covers footprint of medium-sized HID wall packs
Available in various lumen packages
Integrated 0-10V dimming
50,000-Hour LED lifespan

Ordering Matrix						
Family Lumen Package			CRI/Color Temp Voltage		Options	
W34	- 70L	-	840	/480		
	55L = 6,500lm, 51W		Blank = 80 CRI / 5000K	Blank = 120-277V, 0-10V Dimming	Blank = No Option	
	70L = 8,500lm, 69W		840 = 80 CRI / 4000K	/480 = 480V, 0-10V Dimming	/PCU = 120-277V Button Photocell	
	90L = 10,000lm, 87W		830 = 80 CRI / 3000K		/MVS = Microwave Motion Sensor	
					/LC = 120-277V Lightcloud® Controller	