



Ultra-economy wall pack with traditional look.

Color: Bronze

Weight: 10.9 lbs

Project:

Type:

Prepared By:

Date:

Driver Info

Type	Constant Current
120V	0.58A
208V	0.34A
240V	0.29A
277V	0.25A
Input Watts	68.3W

LED Info

Watts	69W
Color Temp	4000K (Neutral)
Color Accuracy	83 CRI
L70 Lifespan	50,000 Hours
Lumens	8,740 lm
Efficacy	128 lm/W

Technical Specifications

Other

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Electrical

Driver:

Constant Current, Class 2, 120-277V, 50/60Hz, 120V: 0.58A, 208V: 0.34A, 240V: 0.29A, 277V: 0.25A

THD:

6.8% at 120V, 7.92% at 277V

Power Factor:

99.6% at 120V, 96.7% at 277V


Compliance

DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

DLC Product Code: P37FYR1A

Dimensions

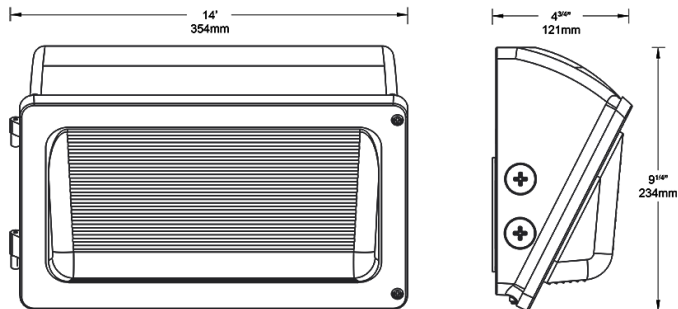

Features

- Economy-grade wall pack with traditional look
- Covers footprint of medium-sized HID wall packs
- Available in various lumen packages
- Integrated 0-10V dimming
- 50,000-Hour LED lifespan

Ordering Matrix

Family		Lumen Package		CRI/Color Temp	Voltage	Options
W34	-	70L	-	840		/MVS
		55L = 6,500lm, 51W 70L = 8,500lm, 69W 90L = 10,000lm, 87W		Blank = 80 CRI / 5000K 840 = 80 CRI / 4000K 830 = 80 CRI / 3000K	Blank = 120-277V, 0-10V Dimming /480 = 480V, 0-10V Dimming	Blank = No Option /PCU = 120-277V Button Photocell /MVS = Microwave Motion Sensor /LC = 120-277V Lightcloud® Controller

All values are nominal with +/- 10% tolerance. See spec sheet for more details.