



<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Type	Constant Current	Watts	9W
120V	0.10A	Color Temp	4000K
208V	N/A	Color Accuracy	90 CRI
240V	N/A	L70 Lifespan	50,000 Hours
277V	N/A	Lumens	650 lm
Input Watts	9W	Efficacy	72.2

**Technical Specifications**

**Performance**

**Description:**

This 4-inch canless wafer downlight has an ultra low-profile design making them a flexible solution for both new construction and retrofit applications. The remote driver box has quick connectors, knockouts, and plenty of space for daisy chain wiring or adding an emergency backup unit.

**Product Type:**

Recessed Downlights

**Input Wattage:**

9W

**Lumens (Nominal):**

650lm

**Efficacy:**

72.2lm/W

**L70 Lifespan:**

50,000-Hour LED lifespan based on IES LM-70 results

**Compliance**

**UL Listed:**

Suitable for wet locations

**Energy Star Approved:**

ENERGY STAR® Version 2.2 Certified

**Energy Star ID:**

2382966

**IC Rated:**

Suitable for direct contact with insulation

**Trade Agreements Act Compliant:**

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

**Electrical**

**Dimming Driver:**

TRIAC compatible dimmer with dimming as low as 10%.

**THD:**

≤20%

**Power Factor:**

≥0.9

**Flicker:**

≤5%

**Input Voltage:**

120V

**Operating Frequency:**

60Hz

**Construction**

**Material:**

Plastic

**Trim Style:**

Smooth Trim

**Shape:**

Round

**Mounting:**

Recessed ceiling

**Operating Temperature:**

-20°C (-4°F) to 40°C (104°F)

**Size:**

4"

**LED Characteristics**

**R9 Value:**

High color performance with R9 greater than or equal to 50

**Technical Specifications (continued)**

**Other**


**Warranty:**

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

**Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

**Dimensions**

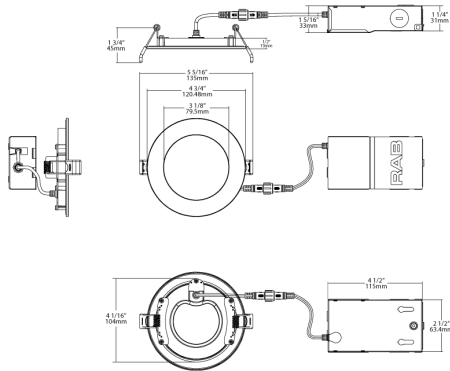

**Features**

- Super slim Edge-lit fixture for thin fixture depth
- No recessed housing or J-box required
- New construction or retrofit applications
- UL wet location rated
- Smooth diffused uniform light distribution
- Dimmable down to 5% on compatible dimmers
- Spring loaded retention clips
- Robust, die cast aluminum construction
- IC and airtight rated
- 5-Year, No-Compromise Warranty

**Ordering Matrix**

Family	Size	Shape	Wattage	CRI/Color Temp	Voltage	Finish	Trim
WFRL	4	R	9	940	120	W	S
	4 = 4"	R = Round	9 = 9W	940 = 90 CRI, 4000K Neutral	120 = 120V (Phase Dimming)	W = White	S = Smooth
	6 = 6"		13 = 13W	930 = 90 CRI, 3000K Warm			