



Color: Bronze

Weight: 10.5 lbs

Project:

Type:

Prepared By:

Date:

Driver Info

| Type        | Constant Current |
|-------------|------------------|
| 120V        | 0.50A            |
| 208V        | 0.30A            |
| 240V        | 0.25A            |
| 277V        | 0.20A            |
| Input Watts | 30-51.9W         |

LED Info

|                |                  |
|----------------|------------------|
| Watts          | 30W              |
| Color Temp     | 3000/4000/5000K  |
| Color Accuracy | 80 CRI           |
| L70 Lifespan   | 100,000 Hours    |
| Lumens         | 4305-7695 lm     |
| Efficacy       | 148.1-159.2 lm/W |

Technical Specifications

Field Adjustability

Field Adjustable:

Field Adjustable Light Output:  
50W/40W/30W (factory default 50W)  
Color temperature (selectable by 3000K, 4000K and 5000K)

Compliance

UL Listed:

Suitable for wet locations

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

IP Rating:

Ingress protection rating of IP65 for dust and water

DLC Listed:

This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.  
DLC Product Code: PLI12W8QB1A2

Performance

Lifespan:

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

Wattage Equivalency:

50W: 200W Metal Halide  
40W: 175W Metal Halide  
30W: 125W Metal Halide

LED Characteristics

LEDs:

Long-life, high-efficiency, surface-mount LEDs

Electrical

Driver:

Constant Current, Class 2, 120-277V, 50/60 Hz, 120V: 0.50A, 208V: 0.30A, 240V: 0.25A, 277V: 0.20A

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

Photocell:

120-277V selectable photocell that can be turned on and off.

Construction

Cold Weather Starting:

The minimum starting temperature is -40°C (-40°F)

Maximum Ambient Temperature:

Suitable for use in up to 50°C (122°F)

Housing:

Die-cast aluminum

Lens:

Tempered glass

Finish:

Formulated for high durability and long-lasting color

Green Technology:

Mercury and UV free. RoHS-compliant components.

Installation

Mounting:

Wall mount

Other

5 Yr Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

## Technical Specifications (continued)

### Lightcloud

#### Lightcloud Blue:

Lightcloud Blue is a Bluetooth Mesh wireless lighting control system that allows you to control RAB's various compatible devices. With RAB's patented Rapid Provisioning technology, devices can be quickly and easily commissioned for residential and large commercial applications using the Lightcloud Blue mobile app. Each device in a system can communicate with any other device, eliminating the need for a Gateway or Hub and maximizing the control system's reach.

DLC system - N1XMLOEATBA (Interior);  
NHCZ2BIA17L (Exterior)

Learn more at [www.lightcloud.com](http://www.lightcloud.com).

#### Gateway Required:

No

#### Communication Protocol:

Bluetooth Mesh

#### Range:


Indoor: Up to 60 feet between standard building materials. Building materials such as brick, concrete, and steel construction may require additional Lightcloud Blue devices to extend around an obstruction; Up to 200 feet clear line of sight.

Outdoor: Up to 60 feet clear line of sight; Up to 18 feet around corners

#### Spacing Criteria:

Lightcloud Blue devices should be placed within the specified range to communicate within the Bluetooth Mesh network.

Dimensions

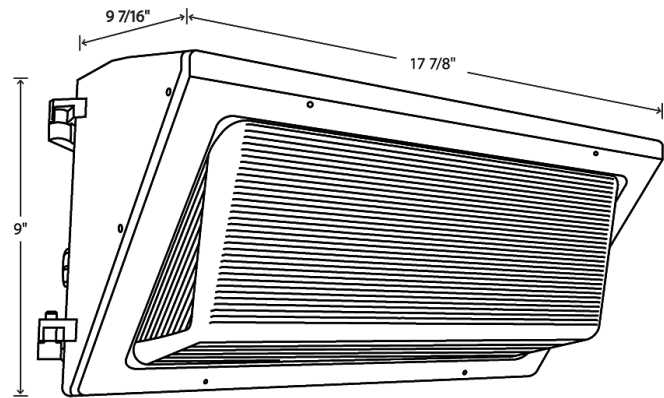

Features

- IP65 Rated
- 100,000-Hour LED lifespan
- 5-Year, limited warranty

Ordering Matrix

| Family                                                                                                                                                                                                                                                                                                                                                       | Wattage | Color Temp | Finish | Driver | Options |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|------------|--------|--------|---------|
| WP3XFU                                                                                                                                                                                                                                                                                                                                                       | 50      |            |        |        | /LCB    |
| <div>50 = 50/40/30W<br/>120 = 120/100/80W<br/>150 = 150/130/100W</div> <div>Blank = 3000/4000/5000K</div> <div>Blank = Bronze</div> <div>Blank = 120-277V, 0-10V Dimming</div> <div>Blank = Selectable Photocell<br/>/LC = Lightcloud<br/>/LCB = Lightcloud Blue<br/>/LCBS = Lightcloud Blue w/PIR Sensor<br/>/LCBS/MVS = Lightcloud Blue w/MVS Sensor</div> |         |            |        |        |         |