



<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Type	Constant	Watts	320/280/240/200W
120V	N/A	Color Temp	3000K/4000K/5000K
208V	N/A	Color	82-84 CRI
240V	N/A	Accuracy	
277V	N/A	L70 Lifespan	100,000 Hours
Input Watts	193.1-313.4W	Lumens	28,533-46,152 lm
		Efficacy	133.8-159.9 lm/W

## Technical Specifications

### Field Adjustability

#### Optical Field Adjustability:

90°, 75° and 55°

#### Field Adjustable:

Field Adjustable Light Output:  
320W/280W/240W/200W (factory default 320W)  
Color Temperature Selectable:  
3000K, 4000K and 5000K (factory default 4000K)

### Compliance

#### UL Listed:

Suitable for wet locations

#### IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

#### IP Rating:

Ingress protection rating of IP65 for dust and water

#### DLC Listed:

This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.  
DLC Product Code: S-5QNL32

### Electrical

#### Driver:

320W: Constant Current, Class 1, 480V, 50/60Hz, 480V: 0.68A

280W: Constant Current, Class 1, 480V, 50/60Hz, 480V: 0.60A

240W: Constant Current, Class 1, 480V, 50/60Hz, 480V: 0.52A

200W: Constant Current, Class 1, 480V, 50/60Hz, 480V: 0.44A

#### Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

#### THD:

7.71% at 480V

#### Power Factor:

96.6% at 480V

#### Surge Protection:

L/N-PE: 2.5kV, L-N: 2.5kV

#### Photocell:

Integrated photocell included with on/off switch

### LED Characteristics

#### LEDs:

Long-life, high-efficacy, surface-mount LEDs

### Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

### Color Consistency:

3000K & 5000K: 5-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color  
4000K: 7-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

### Performance

#### Lifespan:

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

#### Performance Data:

[Click here for the X22-320 performance data](#)

#### Wattage Equivalency:

320W: Replaces up to 1000W Metal Halide (MH) or 1000W High Pressure Sodium (HPS)

280W: Replaces up to 1000W Metal Halide (MH) or 750W High Pressure Sodium (HPS)

240W: Replaces up to 1000W Metal Halide (MH) or 750W High Pressure Sodium (HPS)

200W: Replaces up to 750W Metal Halide (MH) or 600W High Pressure Sodium



## Technical Specifications (continued)

### Construction

---

**Cold Weather Starting:**

The minimum starting temperature is -30°C (-22°F)

**Maximum Ambient Temperature:**

Suitable for use in up to 50°C (122°F)

**Housing:**

Die-cast aluminum

**Mounting:**

Robust knuckle mount with 180° adjustable swivel arm. Tilt angle in 10° increments. Yoke kit is included.

**Lens:**

Tempered glass

**Effective Projected Area:**

1 Fixture: 0.759 ft<sup>2</sup>

2 Fixtures at 90°: 1.985 ft<sup>2</sup>

2 Fixtures at 180°: 1.517 ft<sup>2</sup>

3 Fixtures at 90°: 2.744 ft<sup>2</sup>

4 Fixtures at 90°: 2.744 ft<sup>2</sup>

**Finish:**

Formulated for high durability and long-lasting color

**Green Technology:**

Mercury and UV free. RoHS-compliant components.

**Other**

---

**Note:**

All values are typical (tolerance +/- 10%)


**5 Yr Limited Warranty:**

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

**Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

## Dimensions

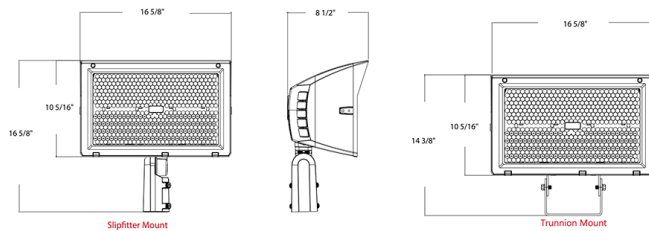

## Features

- DLC Premium listed
- IP65 Rated
- 100,000-Hour LED lifespan
- 5-Year, limited warranty

## Ordering Matrix

Family	Wattage	Color Temp	Mounting	Finish	Beam Angle	Voltage	Options
X22	-	320	Blank	W		/480	
	35 = 35/30/25/20W 60 = 60/50/40/30W 80 = 80/70/60/50W 150 = 150/125/100/75W 250 = 250/220/190/160W 320 = 320/280/240/200W 420 = 420/380/340/300W 500 = 500/450/420/380W 20 = 20/17/13/10W	<b>Blank = 3000K/4000K/5000K</b> CCT Adjustable	<b>Blank = Knuckle</b> Mount Installed with Yoke Kit Included <b>Blank = Knuckle</b> Mount Installed with Trunnion Kit Included <b>Blank = Slipfitter</b> Mount Installed with Trunnion Kit Included	<b>Blank =</b> Bronze <b>W = White</b>	<b>Blank =</b> Selectable Beam Angle (Medium to Very Wide Flood 55-100°)	<b>Blank =</b> 120-277V <b>/480 = 480V,</b> 0-10V Dimming	<b>Blank =</b> Selectable On/Off Photocell

*X22-20 & X22-35: Knuckle mount installed with yoke mount included.*  
*X22-60 & X22-80: Knuckle mount installed with trunnion mount included.*  
*X22-150-500: Slipfitter mount installed with trunnion mount included. 480V only available in 150W-500W.*