



Color: Bronze

Weight: 32.9 lbs

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Type	Constant	Watts	420/380/340/300W
120V	3.41A	Color Temp	3000K/4000K/5000K
208V	2.00A	Color	82-84 CRI
240V	1.73A	Accuracy	
277V	1.53A	L70 Lifespan	100,000 Hours
Input Watts	289.5-423.1W	Lumens	43,487-64,206 lm
		Efficacy	138.5-163.4 lm/W

### Technical Specifications

#### Field Adjustability

**Optical Field Adjustability:**

90°, 75° and 55°

**Field Adjustable:**

Field Adjustable Light Output:  
420W/380W/340W/300W (factory default 420W)  
Color Temperature Selectable:  
3000K, 4000K and 5000K (factory default 4000K)

#### Compliance

**UL Listed:**

Suitable for wet locations

**IESNA LM-79 & LM-80 Testing:**

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

**IP Rating:**

Ingress protection rating of IP65 for dust and water

**DLC Listed:**

This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.  
DLC Product Code: S-RKBJ2L

#### Electrical

**Driver:**

420W: Constant Current, Class 1, 120-277V, 50/60Hz, 120V: 3.41A, 208V: 2.00A, 240V: 1.73A, 277V: 1.53A

380W: Constant Current, Class 1, 120-277V, 50/60Hz, 120V: 3.14A, 208V: 1.83A, 240V: 1.60A, 277V: 1.41A

340W: Constant Current, Class 1, 120-277V, 50/60Hz, 120V: 2.75A, 208V: 1.65A, 240V: 1.43A, 277V: 1.28A

300W: Constant Current, Class 1, 120-277V, 50/60Hz, 120V: 2.44A, 208V: 1.47A, 240V: 1.28A, 277V: 1.14A

**Dimming Driver:**

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

**THD:**

2.57% at 120V, 6.09% at 277V

**Power Factor:**

99.9% at 120V, 94.7% at 277V

**Surge Protection:**

L/N-PE: 2.5kV, L-N: 2.5kV

**Photocell:**

Integrated photocell included with on/off switch

#### LED Characteristics

**LEDs:**

Long-life, high-efficacy, surface-mount LEDs

**Color Uniformity:**

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

**Color Consistency:**

3000K & 5000K: 5-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color  
4000K: 7-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

#### Performance

**Lifespan:**

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

**Performance Data:**

[Click here for the X22-420 performance data](#)

## Technical Specifications (continued)

### Wattage Equivalency:

420W: Replaces up to 2000W Metal Halide (MH) or 1500W High Pressure Sodium (HPS)

380W: Replaces up to 1500W Metal Halide (MH) or 1000W High Pressure Sodium (HPS)

340W: Replaces up to 1500W Metal Halide (MH) or 1000W High Pressure Sodium (HPS)

300W: Replaces up to 1000W Metal Halide (MH) or 1000W High Pressure Sodium

### Construction

#### Cold Weather Starting:

The minimum starting temperature is -30°C (-22°F)

#### Maximum Ambient Temperature:

Suitable for use in up to 50°C (122°F)

#### Housing:

Die-cast aluminum

#### Mounting:

Robust knuckle mount with 180° adjustable swivel arm. Tilt angle in 10° increments. Yoke kit is included.

#### Lens:

Tempered glass

#### Effective Projected Area:

1 Fixture: 1.142 ft<sup>2</sup>

2 Fixtures at 90°: 2.712 ft<sup>2</sup>

2 Fixtures at 180°: 2.285 ft<sup>2</sup>

3 Fixtures at 90°: 3.854 ft<sup>2</sup>

4 Fixtures at 90°: 3.854 ft<sup>2</sup>

#### Finish:

Formulated for high durability and long-lasting color

#### Green Technology:

Mercury and UV free. RoHS-compliant components.

#### Other

##### Note:

All values are typical (tolerance +/- 10%)


#### 5 Yr Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

### Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

**Dimensions**

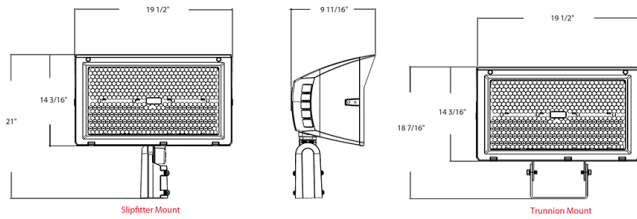

**Features**

- DLC Premium listed
- IP65 Rated
- 100,000-Hour LED lifespan
- 5-Year, limited warranty

**Ordering Matrix**

Family	Wattage	Color Temp	Mounting	Finish	Beam Angle	Voltage	Options
X22	-	420	Blank				
	35 = 35/30/25/20W 60 = 60/50/40/30W 80 = 80/70/60/50W 150 = 150/125/100/75W 250 = 250/220/190/160W 320 = 320/280/240/200W 420 = 420/380/340/300W 500 = 500/450/420/380W 20 = 20/17/13/10W	Blank = 3000K/4000K/5000K CCT Adjustable	Blank = Knuckle Mount Installed with Yoke Kit Included Blank = Knuckle Mount Installed with Trunnion Kit Included Blank = Slipfitter Mount Installed with Trunnion Kit Included	Blank = Bronze W = White	Blank = Selectable Beam Angle (Medium to Very Wide Flood 55-100°)	Blank = 120-277V /480 = 480V, 0-10V Dimming	Blank = Selectable On/Off Photocell

*X22-20 & X22-35: Knuckle mount installed with yoke mount included.  
 X22-60 & X22-80: Knuckle mount installed with trunnion mount included.  
 X22-150-500: Slipfitter mount installed with trunnion mount included. 480V only available in 150W-500W.*