



Color: Bronze

Weight: 32.9 lbs

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Type	Constant	Watts	500/450/420/380W
120V	4.23A	Color Temp	3000K/4000K/5000K
208V	2.45A	Color	82-83 CRI
240V	2.12A	Accuracy	
277V	1.87A	L70 Lifespan	100,000 Hours
Input Watts	373.7-496.2W	Lumens	53,877-74,093 lm
		Efficacy	132.3-157.8 lm/W

## Technical Specifications

### Field Adjustability

**Optical Field Adjustability:**

90°, 75° and 55°

**Field Adjustable:**

Field Adjustable Light Output:  
500W/460W/420W/380W (factory default 500W)  
Color Temperature Selectable:  
3000K, 4000K and 5000K (factory default 4000K)

### Compliance

**UL Listed:**

Suitable for wet locations

**IESNA LM-79 & LM-80 Testing:**

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

**IP Rating:**

Ingress protection rating of IP65 for dust and water

**DLC Listed:**

This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.  
DLC Product Code: S-RPXWQ1

### Electrical

**Driver:**

500W: Constant Current, Class 1, 120-277V, 50/60Hz, 120V: 4.23A, 208V: 2.45A, 240V: 2.12A, 277V: 1.87A

450W: Constant Current, Class 1, 120-277V, 50/60Hz, 120V: 3.85A, 208V: 2.18A, 240V: 1.90A, 277V: 1.67A

420W: Constant Current, Class 1, 120-277V, 50/60Hz, 120V: 3.43A, 208V: 2.02A, 240V: 1.74A, 277V: 1.54A

380W: Constant Current, Class 1, 120-277V, 50/60Hz, 120V: 3.11A, 208V: 1.83A, 240V: 1.59A, 277V: 1.41A

**Dimming Driver:**

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

**THD:**

2.86% at 120V, 4.99% at 277V

**Power Factor:**

99.9% at 120V, 97.2% at 277V

**Surge Protection:**

L/N-PE: 2.5kV, L-N: 2.5kV

**Photocell:**

Integrated photocell included with on/off switch

### LED Characteristics

**LEDs:**

Long-life, high-efficacy, surface-mount LEDs

**Color Uniformity:**

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

**Color Consistency:**

3000K & 5000K: 5-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color  
4000K: 7-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

### Performance

**Lifespan:**

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

**Performance Data:**

[Click here for the X22-500 performance data](#)

## Technical Specifications (continued)

### Wattage Equivalency:

500W: Replaces up to 2000W Metal Halide (MH) or 1500W High Pressure Sodium (HPS)

450W: Replaces up to 2000W Metal Halide (MH) or 1500W High Pressure Sodium (HPS)

420W: Replaces up to 2000W Metal Halide (MH) or 1500W High Pressure Sodium (HPS)

380W: Replaces up to 1500W Metal Halide (MH) or 1000W High Pressure Sodium

### Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

## Construction

### Cold Weather Starting:

The minimum starting temperature is -30°C (-22°F)

### Maximum Ambient Temperature:

Suitable for use in up to 50°C (122°F)

### Housing:

Die-cast aluminum

### Mounting:

Robust knuckle mount with 180° adjustable swivel arm. Tilt angle in 10° increments. Yoke kit is included.

### Lens:

Tempered glass

### Effective Projected Area:

1 Fixture: 1.142 ft<sup>2</sup>

2 Fixtures at 90°: 2.712 ft<sup>2</sup>

2 Fixtures at 180°: 2.285 ft<sup>2</sup>

3 Fixtures at 90°: 3.854 ft<sup>2</sup>

4 Fixtures at 90°: 3.854 ft<sup>2</sup>

### Finish:

Formulated for high durability and long-lasting color

### Green Technology:

Mercury and UV free. RoHS-compliant components.

## Other


### Note:

All values are typical (tolerance +/- 10%)

### 5 Yr Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

## Dimensions

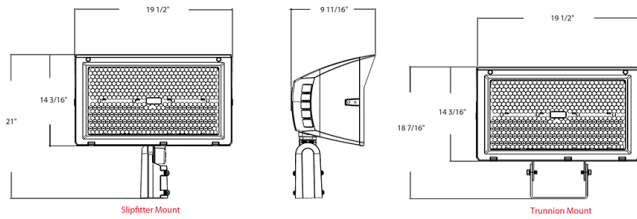

## Features

- DLC Premium listed
- IP65 Rated
- 100,000-Hour LED lifespan
- 5-Year, limited warranty

## Ordering Matrix

Family	Wattage	Color Temp	Mounting	Finish	Beam Angle	Voltage	Options
X22	-	500	Blank				
	35 = 35/30/25/20W 60 = 60/50/40/30W 80 = 80/70/60/50W 150 = 150/125/100/75W 250 = 250/220/190/160W 320 = 320/280/240/200W 420 = 420/380/340/300W 500 = 500/450/420/380W 20 = 20/17/13/10W	Blank = 3000K/4000K/5000K CCT Adjustable	Blank = Knuckle Mount Installed with Yoke Kit Included Blank = Knuckle Mount Installed with Trunnion Kit Included Blank = Slipfitter Mount Installed with Trunnion Kit Included	Blank = Bronze W = White	Blank = Selectable Beam Angle (Medium to Very Wide Flood 55-100°)	Blank = 120-277V /480 = 480V, 0-10V Dimming	Blank = Selectable On/Off Photocell

*X22-20 & X22-35: Knuckle mount installed with yoke mount included.*

*X22-60 & X22-80: Knuckle mount installed with trunnion mount included.*

*X22-150-500: Slipfitter mount installed with trunnion mount included. 480V only available in 150W-500W.*