




Portable Pool & Spa Timer

Model P1101

OWNER'S MANUAL

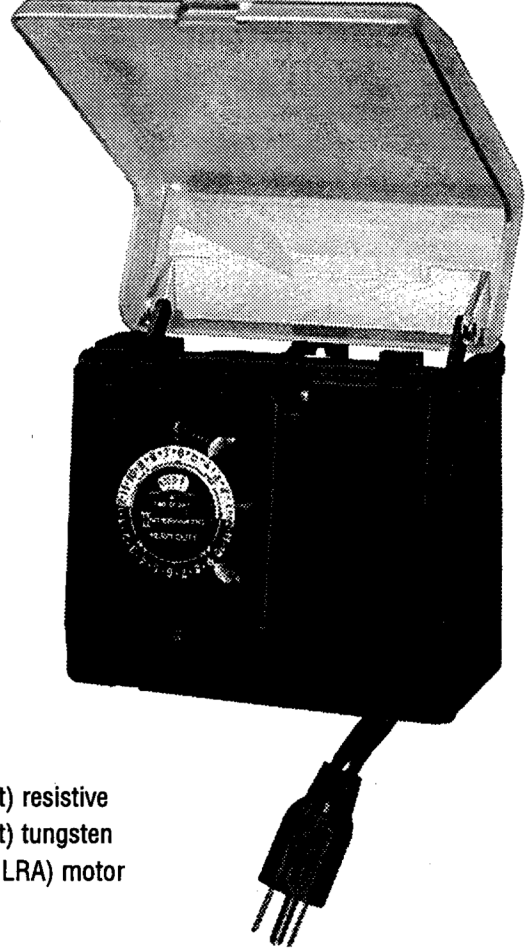

Electrical Rating

15 amp (1800 watt) resistive
15 amp (1800 watt) tungsten
1 H.P. (15 FLA, 90 LRA) motor
120V 60 Hz

About Intermatic Incorporated

Intermatic Incorporated is the largest manufacturer of timers in the world. For more than 50 years, we have been committed to making quality timers, and it is our hope that this product will provide you with convenience, service and peace of mind for many years. If you have any questions about your Portable Pool and Spa Timer, or would like to receive information on our low voltage garden lighting or home automation and protection products, please call or write to us at . . .



©2024 Intermatic Incorporated Libertyville, IL 60048 158--02737

* Timer should not be used over its rated capacity. The protective cover should always be in place.

Symptom	Cause(s)	Corrective Action
No power at timer's receptacle	• No power to timer • Timer contacts open	Check circuit breaker in panel. Turn timer to ON, check timer setting and operation.
Timer loses time	• Power to timer is not continuous • Check branch circuit that timer is plugged in to.	Replace timer. Replace timer.
Timer's receptacle is "hot" (energized) at all times	• No OFF trippers in dial • Defective timer*	Check timer operation. Replace timer.

Troubleshooting Guide

SAVE THIS MANUAL

- **DANGER:** To reduce the risk of injury, they are closely supervised at all times.
- Do not permit children to operate the timer or pool/spa unless they are closely supervised at all times.
- Test GROUND FAULT protection regularly. If it fails to reset, DO NOT USE the pool or spa! Contact a qualified service technician.
- Always disconnect electricity before servicing this timer or the equipment connected to it. THIS TIMER IS NOT TO BE USED AS A POWER DISCONNECT.
- Use timer only for its intended use as described in this manual.
- Install only on a GROUNDED 120VAC circuit protected by a fuse or circuit breaker.



IMPORTANT SAFETY INSTRUCTIONS

You have made the right choice in purchasing a Pool and Spa Timer that provides not only convenience and energy savings but which also will extend the life of the pool equipment and maintain consistent water quality. This timer is designed for indoor and outdoor use and features a See-Through Rain Shield.


Congratulations

1. Insert ON (green) and OFF (red) trippers into dial at desired ON and OFF times (Fig. 1). Be sure trippers are firmly pressed against dial surface and at least one space is left between ON and OFF trippers (Fig. 2).
2. Turn dial clockwise one or more revolutions until correct time of day is next to arrow in center of dial (Fig. 3).
3. Plug pump into timer receptacle and plug timer cord into outlet. If timer is used outdoors, outlet must be suitable for wet locations.

How to Set the Timer



Extra trippers may be stored on the dial by placing same color trippers next to each other.

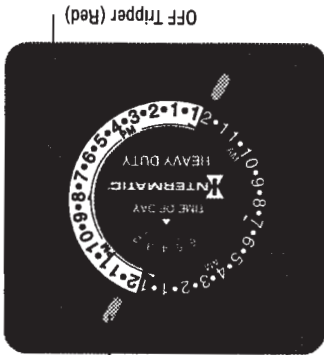

Manual Knob
ON Tripper (Green)
OFF Tripper (Red)

For Early ON or OFF Operation
Turn manual knob counter-clockwise to desired ON or OFF position. Timer will follow next scheduled automatic operation.