

# Catalog

# Volume 1


Addendum  
Custom Architectural Wallplates

## Standard architectural wallplates

2-, 3- and 4-gang wallplates in ten matte colors  
(48-hours shipment available)



H: 4.56 in x W: 4.56 in




### Fins broken wallplates (FB)

- Controls fit into standard size backboxes with standard size wallplates
- Dimmers must be derated, pg. 170

### Use with:

- Vareo®
- NovaT☆®
- Architectural accessories


### What's included:




Adapter plate, screws, wallplate (inserts not included)

## Customized architectural wallplates

Create a wallplate for any application

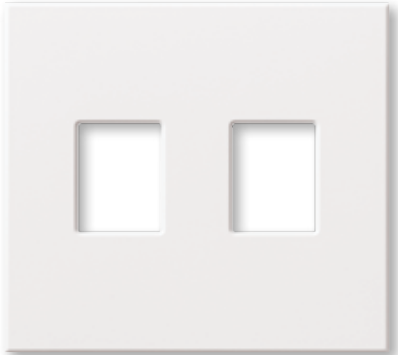

H: 4.56 in x W: 4.56 in




### Fins broken wallplates (FB)

- Controls fit into standard size backboxes with standard size wallplates
- **Dimmers must be derated**
- Combines large and small controls


### Use with:

- Vareo®
- NovaT☆®
- Architectural accessories


### What's included:



Adapter plate, screws, wallplate

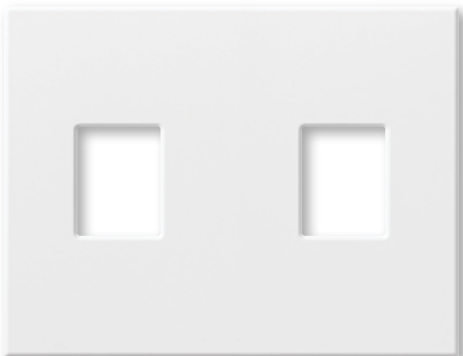

H: 4.56 in x W: 5.41 in



### No fins broken wallplates (NFB)


- Controls require wider-than-standard backboxes and wallplates (see pgs. B7–B8)
- **Dimmers can be used to their full capacity**
- Combines large and small controls

Multi-gang, screwless, seamless wallplates available—wallplate selector tool at [www.lutron.com/lutron/wallplate](http://www.lutron.com/lutron/wallplate).

Lutron's architectural style controls can be ganged at full dimmer capacity using "No Fins Broken" wallplates. When using "Fins Broken" wallplates, maximum dimmer capacity must be derated. See pg. 170

## Determine which architectural wallplate is right for your application

Standard architectural wallplates




### Fins broken wallplates (FB)

- 48-hour shipment available
- Use to conserve horizontal wall space


---

## Custom architectural wallplates



### Fins broken wallplates (FB)

- If you need to conserve horizontal wall space
- If you need to combine large and small controls
- If you need metal wallplates or custom colors



### No fins broken wallplates (NFB)

- If you need to combine large and small controls
- If you need metal wallplates or custom colors
- If you require full wattage rating of dimmers


Lutron's architectural style controls can be ganged at full dimmer capacity using "No Fins Broken" wallplates. When using "Fins Broken" wallplates, maximum dimmer capacity must be derated. See pg. 170

**How to construct a wallplate model number**

Use the following steps to order multi-gang, metal, and replacement wallplates

**1. Product Code**

**NT** Thin profile (D: 0.3in or 7.6mm)

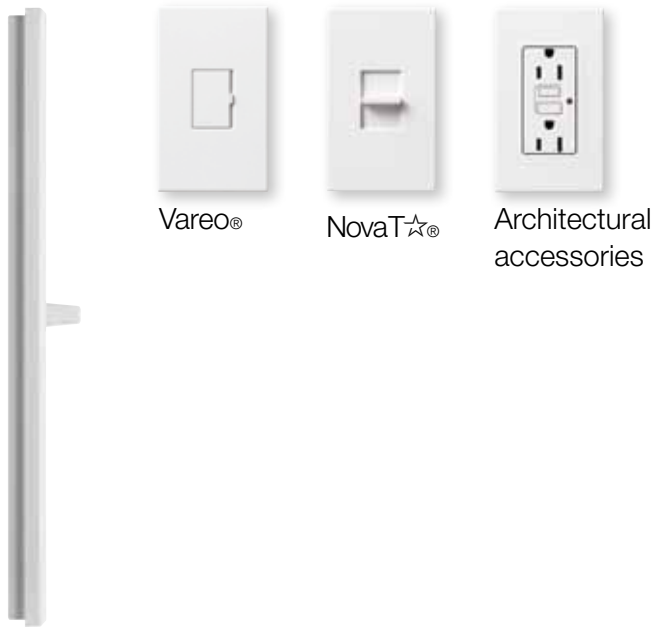

**N** Wide profile (D: 0.65in or 16.5mm)



When ganging products together under a common wallplate the product's depth must be the same style (NT or N).

**NT-SOL-FB-WH**

**2. Insert Code(s)**



The detachable face of the product is called an insert. Each product has its own Insert Code, see pgs. B5–B6 for a complete listing of model numbers and their insert codes.

Select Insert Codes and add to model numbers in left to right order as if looking at the front of the wallplate (see example at the bottom of this page).




Inserts used in a fins broken application.  
 From left to right:  
 NovaT® (small control)  
 Vareo® (small control)  
 NovaT® (large control)

**NT-SOL-FB-WH**


## 3. Ganging code

### FB



Fins broken


### NFB




No fins broken

Mixing small and large controls


**Correct:** group small and large at either end



4.5 in required for vertical installations



**Incorrect:** do not alternate small and large



Determine whether controls need to use maximum load capacity or can be derated. Derating is the reduction of the maximum capacity (load) a unit can reliably handle when fins/side sections are removed. A scored section along each side of the mounting plate/fin is designed to be removed to facilitate ganging.

See pg. 170 for more information about your specific product's derated capacities. Note: If **any** controls are ganged under the same wallplate with no fins broken, then the ganging code is NFB.

## 4. Color code

### Available colors

**Colors** (architectural matte finish) (3–5 days)\*

<b>WH</b> White	<b>GR</b> Gray
<b>BE</b> Beige	<b>TP</b> Taupe
<b>IV</b> Ivory	<b>BR</b> Brown
<b>AL</b> Almond	<b>BL</b> Black
<b>LA</b> Light Almond	<b>SI</b> Sienna

**Metals** (special finishes) (4–6 weeks)†

<b>SB</b> Satin Brass	<b>SC</b> Satin Chrome
<b>BB</b> Bright Brass	<b>SN</b> Satin Nickel
<b>BC</b> Bright Chrome	<b>BN</b> Bright Nickel
<b>QB</b> Antique Brass	<b>AU</b> Gold Plated
<b>QZ</b> Antique Bronze	

### Anodized aluminum

<b>CLA</b> Clear	<b>BRA</b> Brass
<b>BLA</b> Black	

Custom colors and finishes are available by providing Lutron® with a paint color number, swatch, or sample. Lutron can color match your controls. Contact Customer Service at 1.888.LUTRON1.

Multi-gang, screwless, seamless wallplates available—wallplate selector tool at [www.lutron.com/lutron/wallplate](http://www.lutron.com/lutron/wallplate).

CAD file downloads available at [www.lutron.com/technical\\_info/cad](http://www.lutron.com/technical_info/cad).

\*Most matte wallplates ship in 3-5 days; wider wallplates require additional time.

†Consult Lutron® Customer Service for pricing and delivery at 1.888.LUTRON1.

# NT-SOL-FB-WH

# NT-SOL-FB-WH

Model Number	Insert Code	Control Size
<b>Vareo®</b>		
V-600-	<b>O</b>	small
V-1000-	<b>O</b>	small
VETS-1000-	<b>K</b>	small
VETS-R-	<b>K</b>	small
<b>Nova T ☆®</b>		
NT-1PS-	<b>S</b>	small
NT-3PS-	<b>S</b>	small
NT-4PS-	<b>S</b>	small
NT-600-	<b>S</b>	small
NT-603P-	<b>P</b>	small
NT-1000-	<b>S</b>	small
NT-1003P-	<b>P</b>	small
NT-1500-	<b>L</b>	large
NT-1503P-	<b>U</b>	large
NT-2000-*	<b>TF</b>	large
NTELV-300-	<b>S</b>	small
NTELV-600-	<b>S</b>	small
NTF-10-	<b>S</b>	small
NTF-103P-	<b>P</b>	small
NTFS-6E-	<b>S</b>	small
NTFS-12E-	<b>L</b>	large
NTFSQ-	<b>S</b>	small
NTFTU-5A-	<b>S</b>	small
NTFTV	<b>S</b>	small
NTLV-600-	<b>S</b>	small
NTLV-603P-	<b>P</b>	small
NTLV-1000-	<b>S</b>	small
NTLV-1003P-	<b>P</b>	small
NTLV-1500-	<b>L</b>	large
NTLV-1503P-	<b>U</b>	large

Model Number	Insert Code	Control Size
<b>Accessories</b>		
NT-6PF-	<b>R3</b> <sup>1</sup>	small
NT-CJ-	<b>9</b>	small
NT-PJ-	<b>R3</b> <sup>1</sup>	small
NTR-15-	<b>R3</b> <sup>1</sup>	small
NTR-15-TR-	<b>R3</b> <sup>1</sup>	small
NTR-15-GFTR-	<b>R3</b> <sup>1</sup>	small
NTR-15-IG-OR-	<b>R3</b> <sup>1</sup>	small
NTR-15-DDTR-	<b>R3</b> <sup>1</sup>	small
NTR-15-HDTR-	<b>R3</b> <sup>1</sup>	small
NTR-20-	<b>R3</b> <sup>1</sup>	small
NTR-20-TR-	<b>R3</b> <sup>1</sup>	small
NTR-20-GFTR-	<b>R3</b> <sup>1</sup>	small
NTR-20-IG-OR-	<b>R3</b> <sup>1</sup>	small
NTR-20-DDTR-	<b>R3</b> <sup>1</sup>	small
NTR-20-HDTR-	<b>R3</b> <sup>1</sup>	small
<b>GRAFIK Eye® Wallstations</b>		
NTGRX-1S-	<b>K</b>	small
NTGRX-2B-SL-	<b>T8</b>	small
NTGRX-4B-	<b>T5</b>	small
NTGRX-4M-	<b>T1</b>	small
NTGRX-4S-	<b>A</b>	small
NTGRX-4S-IR-	<b>A</b>	small
NTGRX-SI4S-IR-	<b>A</b>	small
SG-2BI-	<b>R3</b>	small
SG-4BI-	<b>R3</b>	small
SG-4MI-	<b>R3</b>	small
SG-4NRLI-	<b>R3</b>	small
SG-4SI-	<b>R3</b>	small
SG-4SIRI-	<b>R3</b>	small

\*NT-2000- must use NFB Series only.  
<sup>1</sup>Product insert is permanently attached. Order the device in the color desired, wallplate will not have an insert to change the device color in the field.

### Blank Inserts and Yokes

For each blank ordered, order one yoke to attach wallplate to backbox.

small blank insert      **E**\*      small  
 large blank insert      **G**\*\*      large



\*small yoke  
 \*\*large yoke


**NT-YS**  
**NT-YL**

Model Number	Insert Code	Control Size
<b>Nova®</b>		
N-600-	<b>S</b>	small
N-603P-	<b>P</b>	small
N-1000-	<b>S</b>	small
N-1003P-	<b>P</b>	small
N-1500-	<b>L</b>	large
N-1503P-	<b>U</b>	large
N-2000-	<b>L</b>	large
N-2003P-	<b>U</b>	large
NF-10-	<b>S</b>	small
NF-10-277-	<b>L</b>	large
NF-103P-	<b>P</b>	small
NF-103P-277-	<b>P</b>	small
NF-20-	<b>L</b>	large
NF-20-277-	<b>L</b>	large
NF-30-	<b>L</b>	large
NFTV-	<b>S</b>	small
NLV-600-	<b>S</b>	small
NLV-603P-	<b>P</b>	small
NLV-1000-	<b>L</b>	large
NLV-1003P-	<b>P</b>	small
NLV-1500-	<b>L</b>	large
NLV-1503P-	<b>U</b>	large
NLV-2003P-	<b>U</b>	large

## Blank Inserts and Yokes

For each blank ordered, order one yoke to attach wallplate to backbox.

small blank insert      **E\***      small  
 large blank insert      **G\*\***      large



\*small yoke  
 \*\*large yoke

**NT-YS**  
**NT-YL**

## Available colors Nova T<sup>☆</sup>®/Vareo® ONLY

**Colors** (architectural matte finish) (3-5 days)\*

<b>WH</b> White	<b>GR</b> Gray
<b>BE</b> Beige	<b>TP</b> Taupe
<b>IV</b> Ivory	<b>BR</b> Brown
<b>AL</b> Almond	<b>BL</b> Black
<b>LA</b> Light Almond	<b>SI</b> Sienna

**Metals** (special finishes) (4-6 weeks)†

<b>SB</b> Satin Brass	<b>SC</b> Satin Chrome
<b>BB</b> Bright Brass	<b>SN</b> Satin Nickel
<b>BC</b> Bright Chrome	<b>BN</b> Bright Nickel
<b>QB</b> Antique Brass	<b>AU</b> Gold Plated
<b>QZ</b> Antique Bronze	

## Anodized aluminum

<b>CLA</b> Clear	<b>BRA</b> Brass
<b>BLA</b> Black	


## Available colors Nova® ONLY

**Colors** (architectural matte finish) (3-5 days)\*

<b>WH</b> White	<b>LA</b> Light Almond
<b>BE</b> Beige	<b>GR</b> Gray
<b>IV</b> Ivory	<b>BR</b> Brown
<b>AL</b> Almond	<b>BL</b> Black

\*Most matte wallplates ship in 3–5 days; wider wallplates require additional time.

†Consult Lutron® Customer Service for pricing and delivery at 1.888.LUTRON1.






**No fins broken wallplates (NFB)** (no derating required—full rated capacity)

- For Vareo® and Nova T☆® installations

For use with installations that **DO NOT** include an NT-2000-

		Number of Small Controls					
		0	1	2	3	4	5
Number of Large Controls	0	NA	1 2.75 in	1+1 5.41 in	4 8.14 in	4+1 10.86 in	7 13.50 in
	1	1 4.56 in	3 7.22 in	5 10.01 in	6 12.68 in		
	2	4 9.09 in	6 11.82 in	7 14.49 in			
	3	6 13.63 in			For larger wallplate configurations, contact Lutron® Customer Service.		

 Number of Small Controls  
 Number of Large Controls  
 number of backboxes  
 wallplate width





**No fins broken wallplates (NFB)** (no derating required—full rated capacity)

- For Vareo® and Nova T☆® installations
- NT-2000- can be used




NT-2000-

		Number of Small Controls			
		0	1	2	3
Number of Large Controls	1	2 4.56 in	2+1 7.22 in	2+1+1 10.01 in	2+4 12.68 in
	2	2+2 9.09 in	2+2+1 11.82 in	2+2+1+1 14.49 in	
	3	2+2+2 13.63 in	For larger wallplate configurations, contact Lutron® Customer Service.		

 Number of Small Controls  
 Number of Large Controls  
 number of backboxes  
 wallplate width



Note: When ganging an even number of small controls, use backboxes with tapped ears.  
Do not use plaster rings or gangbox covers.






- Fins broken wallplates (FB)** (derating required)
- for Vareo® and Nova T☆® installations

		Number of Small Controls						
		0	1	2	3	4	5	6
Number of Large Controls	0	NA	1	2 4.56 in	3 6.32 in	4 8.45 in	5 9.97 in	6 11.85 in
	1	1 4.56 in	3 6.32 in	4 8.14 in	5 9.97 in	6 11.85 in	7 15.5 in	
	2	3 8.20 in	5 9.97 in	6 11.79 in	7 15.5 in			
	3	5 11.85 in	7 15.5 in					For larger wallplate configurations, contact Lutron® Customer Service.



  

  
 number of backboxes  
 wallplate width

### Example: plus sign (1 + 1) two small controls


The plus sign (1 + 1) indicates the need for additional backboxes connected by a chase nipple or spacer with 3/4 in separation as shown.



Two single-gang backboxes connected by a chase nipple with 3/4 in separation.




Use a spacer, chase nipple or Lutron® part# PLUS-ADAPTER® -3.5.



Two small controls mounted on a no fins broken adapter plate (provided with wallplate).



See pgs. B5–B6 for small and large control model numbers.



No Fins Broken (NFB) screwless seamless wallplate with no visible hardware NT-SS-NFB-WH.

**Multi-gang Worksheet (1-6 Gang Installation)**

COPY FOR EACH USE

Wallplate Thickness:  Thin Profile Vareo®/NovaT<sup>☆</sup>® **or**  Heavy Duty Nova®

Wallplate Width:  FB (Fins Broken) **or**  NFB (No Fins Broken)

- For use with Vareo®, NovaT<sup>☆</sup>® and Nova®
- Outline wallplate gang size below with a marker (cross out the rest)

	Position 1	Position 2	Position 3	Position 4	Position 5	Position 6
Load Type						
Load Size W/A/A						
Number of Fins Removed						
Control Model Number						
Full Rating (No Fins Broken)						
Derated Capacity (Fins Broken)						
Small or Large Control						
Wallplate Insert Code						
Interface (if needed)						

Wallplate Model #: \_\_\_\_\_

Wallplate Color: \_\_\_\_\_

Customization:  Engraving  Custom Color  Silk Screen

Backbox Configurations: \_\_\_\_\_

**Vertical Installations**

4.5" Required

**Mixing Small and Large Controls**

Group large controls together on one end of the wallplate. Do not alternate large and small controls.

Correct: [Sm Sm] [Lg] [Sm Sm] [Lg] [Sm Sm]

Incorrect: [Lg Sm] [Lg] [Sm Sm] [Lg] [Sm Sm]

**Mounting Small and Large Controls**

Mount using center or offset mounting holes as needed.

<b>LUTRON®</b>	Project Name: _____
FAX East: 610.282.8321	Room: _____
Coopersburg, PA 18036	Control Address #: _____
Phone: 1.888.LUTRON1	P.O. #: _____
	Lutron Order #: _____
	Lutron Job #: _____

For additional information use the Wallplate Selector tool located on the Lutron® website at [www.lutron.com/lutron/wallplate](http://www.lutron.com/lutron/wallplate).