

Graesslin Mechanical Time Switch - 24-Hour 24V Electromechanical Panel Mount Timer Module, 15 Minute Intervals, 21A, SPDT

Item FM1STUZ-24U



PRODUCT DESCRIPTION

The FM1 series timer modules are designed to be integrated inside of a machine control panel, circuit board, or other equipment. They are a simple and low cost alternative for applications that do not require more than 21 A or 2 HP, 240 VAC. The FM1 is designed for 24-hour or 7-day control or overriding a functional typical state of a heating, ventilation, refrigeration, lighting, security, or pump system. The FM1 series is ideal for 12, 24 VAC/VDC, 120 or 208/240VAC single-phase general applications.

FEATURES

- ▶ 21 A SPDT Switch
- ▶ Captive trippers with 15-minute intervals on 24-hour models and 2-hour intervals on 7-day models
- ▶ 72-hour carry-over battery backup on Q models
- ▶ Noise immune – ideal for robust applications
- ▶ Synchronous drive or quartz drive Q models with self-recharging battery backup
- ▶ True clock face, easy-to-set
- ▶ Available with or without override
- ▶ Compact size
- ▶ Clear plastic cover (DC-FME-A), sold separately
- ▶ Standalone or with indoor/outdoor enclosure, sold separately

APPLICATIONS


- ▶ Refrigeration Merchandiser
- ▶ Air Movement & Ventilation
- ▶ Aeration
- ▶ Septic Treatment
- ▶ Generator Exercising

TECHNICAL DATA

General	
Model Number	FM1STUZ-24U
Description	24-Hour 24V Electromechanical Panel Mount Timer Module, 15 Minute Intervals, 21A, SPDT
UPC Code	078275152854
Brand	Domestic Intermatic
Country of Origin (Intermatic)	MEXICO
Warranty Period	1-Year limited
Control Specifications	
Maximum Cycle Time	24 hrs
Timing Interval	15 min
Clock Drive Type	Synchronous
Mechanism Type	Electromechanical
Has Captive Trippers	Yes
Has Real-time Clock Face	Yes
Application Compatibilities	Incandescent; Fluorescent; CFL; LED
Mechanical Specifications	
Mounting Options	Panel

Dimensions	
Product Dimensions (H x W x D) in	2 23/64 x 2 23/64 x 1 1/4 in
Load Ratings	
Motor Load Ratings Ranges	1 HP, 120 VAC; 2 HP, 250 VAC
Electrical Specifications	
Maximum Power Consumption (VA)	1
Wiring Option	1/4" Quick connect terminals
Switch Type	SPDT
Display and Format	
Shortest switching time	ON/OFF 15 minutes
Packaging	
Shipping Weight (lbs)	0.23
Unit Carton Dimensions (H x W x L) in	2.25 x 3.25 x 3.25 in
Environmental Specifications	
Operating Humidity	0 to 95%, Non-condensing
Temperature (operation)	-40 °F to 185 °F / (-40 °C to 85 °C)
Standards and Certifications	
CSA Certification	cCSAus
Other Certifications and Compatibilities	cRUus; CE
UL File Number	E10694
CSA File Number	LR3730
California Proposition 65	None

DRAWINGS AND DIAGRAMS

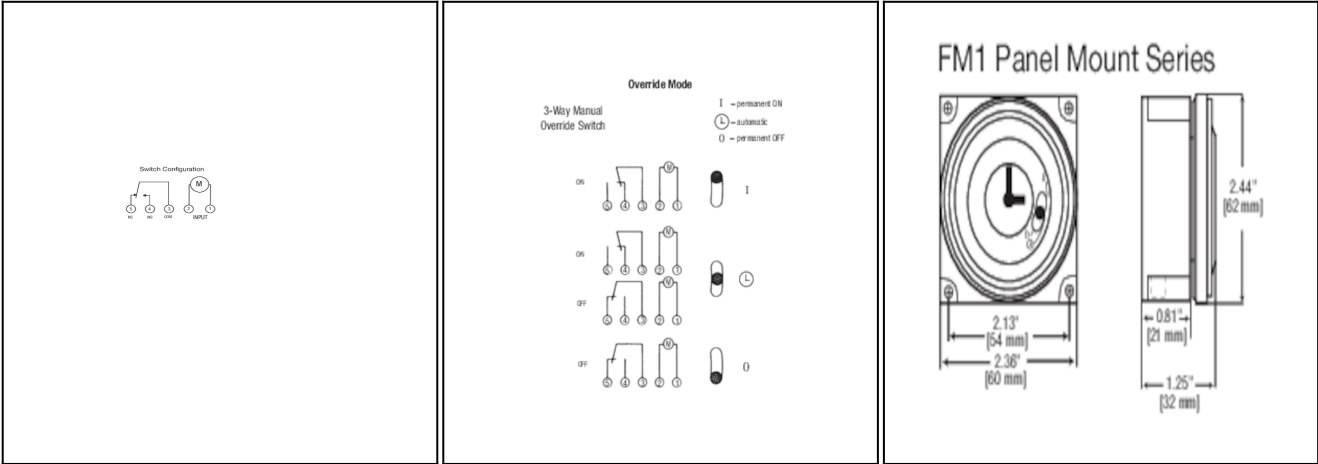

ACCESSORIES



DC-FME-A
Clear Dust Cover for Electronic Panel Mount
Timers



FM-SU
FM1 Surface/DIN Rail Kit



FM-FU
FM1 Flush Mount Housing Kit



E200
Case-Outdoor, Type 3R Plastic, Gray



E150
Case-Indoor, Type 1 Plastic, Gray