



| | |
|---------------------|--------------|
| Project: | Type: |
| Prepared By: | Date: |

Technical Specifications

Performance

Product Type:

A-Line

Input Wattage:

15.5W

Wattage Equivalency:

100W Incandescent

Lumens (Nominal):

1,680lm

Efficacy:

97lm/W

L70 Lifespan:

15,000 Hours

Construction

Bulb Shape:

A19

Base Type:

GU24

For Use Outdoors in Open Fixtures:

No

LED Characteristics

Color Temperature:

4000K Cool White

Color Accuracy (CRI):

80 CRI

Electrical

Power Factor:

≥0.7

Operating Temperature:

-20°C to 45°C (-4°F to 113°F)

Dimmable:

Yes, down to 10%

Input Voltage:

120V

Operating Frequency:

60 Hz

Optical

Beam Angle:

230°

Other

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Compliance

Energy Star Approved:

This product is ENERGY STAR® Version 2.0 Certified

Energy Star ID:

2329589


California Energy Commission (CEC) Status:

Not Lawful for Sales in California


Case and Pallet Dimensions

| | QTY | LENGTH (in) | WIDTH (in) | HEIGHT (in) |
|--------|------|-------------|------------|-------------|
| CASE | 12 | 15.4 | 5.2 | 5 |
| PALLET | 2268 | 47.2 | 39.4 | 45.7 |

Dimension

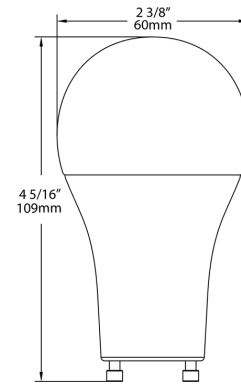

Light Distribution

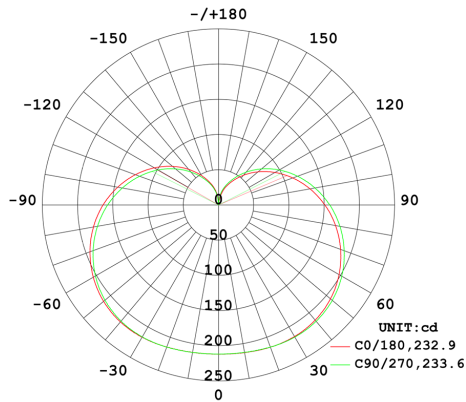

Features

- Replacement for High-output Incandescent or lower wattage metal halide and high pressure sodium lamps
- Rated for use in enclosed and open fixtures in dry or damp locations
- Ideal for post top, bollards, and outdoor corridor lighting
- Suitable for use in a base-up or base-down position

Ordering Matrix

| Family | Wattage | Base Type | CRI/Color Temp | Dimmable |
|--------|--|------------------------------------|---|---------------------------------------|
| A19 | 16 | GU24 | 840 | DIM |
| | 5 = 5W 9 = 9W 10 = 10W 13 = 13W 15 = 15W 16 = 16W 23 = 23W | E26 = E26 Base GU24 = GU24 Base | 850 = 80 CRI, 5000K 840 = 80 CRI, 4000K 835 = 80 CRI, 3500K 830 = 80 CRI, 3000K 827 = 80 CRI, 2700K | DIM = Dimmable DIM 120V = Dimmable |