



UPC: 192552025409

Color: White

Weight: 0.2 lbs

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

### Technical Specifications

#### Performance

**Product Type:**

A-line Commercial Bulbs

**Description:**

Ideal replacement for legacy HID or high output incandescent bulbs.

**Wattage Equivalency:**

Equivalent to 125W Metal Halide

**Input Wattage:**

16.5W

**Lumens (Nominal):**

2,000lm

**Efficacy:**

121lm/W

**L70 Lifespan:**

25,000-Hour LED lifespan based on IES LM-70 results

#### Electrical

**Power Factor:**

>0.7

**Dimmable:**

No

**Dimming Type:**

Not suggested for dimming applications

**Input Voltage:**

120-277V

**Operating Frequency:**

50/60Hz

#### LED Characteristics

**Color Temperature:**

4000K

**Color Accuracy (CRI):**

≥90

**R9 Value:**

High color performance with R9 no less than 0

**Color Consistency:**

<4-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

#### Construction

**Base Type:**

E26 Edison

**Finish:**

White

**Bulb Shape:**

A21

**Endcap Material:**

Aluminum

**Enclosure Material:**

Polycarbonate

**Lens Finish:**

Frosted

#### Compliance

**Listings:**

UL Listed

**Fixture Rating:**

Suitable for use in enclosed fixtures

**Energy Star Approved:**

No.  
There is no product category on Energy Star for this lamp to qualify under.

**T20 Compliant:**

Can be used to conform with the requirements of California Title 20

**California Title 24 JA8 Compliant:**

Not Compliant

## Technical Specifications (continued)

### California Energy Commission (CEC) Status:

Lawful for Sales in California

### RoHS:

Mercury and UV free. RoHS-compliant components.

### FCC:

Complies with Part 15B of the FCC Rules

### Other

#### Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

#### Note:

All values are typical (tolerance +/- 10%)


#### Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

## Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	12	12.83	9.69	6
PALLET	64	45.04	38.74	49.45

## Dimension

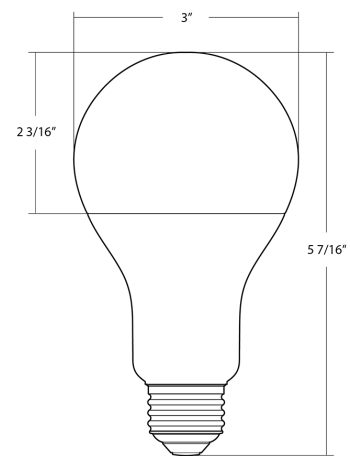

## Features

- Replacement for High output incandescent or Metal Halide and High Pressure Sodium HID Lamps
- Commercial Grade
- Large metal heatsink for optimal heat dissipation
- In HID retrofit applications - Integral Driver enables lamp to be wired directly to line voltage. Must bypass ballast
- Rated for use in enclosed and open fixtures in dry or damp locations
- Ideal for post top, bollards, and outdoor corridor lighting
- Environmentally friendly, no mercury used
- UL Listed, ENERGY STAR Compliant
- Non-Dimmable
- Universal Voltage 120 through 277V
- 50,000 hour Lifespan
- 5 Year No Compromise Warranty

## Ordering Matrix

Family	Lamp Power	Base Type	CRI/Color Temp	Dimmable	Voltage
A21	16.5	E26	940	ND	UNV
	16.5 = 16.5W 17 = 17W 23 = 23W 24 = 24W 32 = 32W	E26 = E26	830 = 80 CRI, 3000K 840 = 80 CRI, 4000K 850 = 80 CRI, 5000K 927 = 90 CRI, 2700K 930 = 90 CRI, 3000K 940 = 90 CRI, 4000K 950 = 90 CRI, 5000K	ND = Non-Dimmable	120_277V = 120-277V UNV = 120/277V