

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Type	Constant Current	Watts	24/19/14W
120V	0.20A/0.16A/0.12A	Color Temp	3000K/4000K/5000K
208V	0.12A/0.10A/0.07A	Color Accuracy	72-75 CRI
240V	0.10A/0.08A/0.06A	L70 Lifespan	50,000 Hours
277V	0.09A/0.07A/0.05A	Lumens	1,725-3,120 lm
Input Watts	24/19/14W	Efficacy	130-141.3 lm/W

## Technical Specifications

### Field Adjustability

#### Field Adjustable:

Field Adjustable Light Output:  
24W/19W/14W (factory default 24W)  
Color temperature selectable by 5000K, 4000K and 3000K (factory default 4000K)

### Compliance

#### UL Listed:

Suitable for wet locations

#### IP Rating:

Ingress protection rating of IP65 for dust and water

#### DLC Listed:

This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.  
DLC Product Code: S-L2IZOA

### Electrical

#### Driver:

Constant Current, Class 2, Class P, 120-277V, 50/60 Hz  
24W: 120V: 0.20A, 208V: 0.12A, 240V: 0.10A, 277V: 0.09A  
19W: 120V: 0.16A, 208V: 0.10A, 240V: 0.08A, 277V: 0.07A  
14W: 120V: 0.12A, 208V: 0.07A, 240V: 0.06A, 277V: 0.05A

#### Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

#### THD:

5.18% at 120V, 8.93% at 277V

#### Power Factor:

99.3% at 120V, 95.7% at 277V

#### Photocell:

Integrated photocell included with on/off switch

#### Surge Protection:

4kV

### Performance

#### Lifespan:

50,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

### LED Characteristics

#### LEDs:

Long-life, high-efficiency, surface-mount LEDs

#### Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

### Construction

#### Cold Weather Starting:

The minimum starting temperature is -40°C (-40°F)

#### Maximum Ambient Temperature:

Suitable for use in up to 45°C (113°F)

#### Housing:

Die-cast aluminum

#### Mounting:

3 (Three) anchors for round version B17 and B17D. 4 (Four) anchors bolts for square version B17S. Internal base doesn't have leveling screws.

## Technical Specifications (continued)

**Lens:**

Polycarbonate lens

**Reflector:**

Aluminum

**Top (Head):**

Flat top

**Shape:**

Square

**Finish:**

Formulated for high durability and long-lasting color

**Green Technology:**

Mercury and UV free. RoHS-compliant components.

**Other**


**5 Yr Limited Warranty:**

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

**Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

## Dimensions

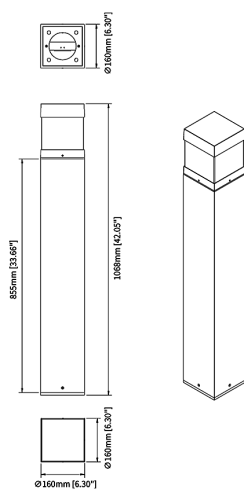

## Features

- 50,000-Hour LED lifespan
- DLC Premium Listed
- 0-10V dimming, standard
- 5-Year, limited warranty

## Ordering Matrix

Family	Shape	Wattage	Color Temp	Voltage	Top (Head)	Finish	Options
B17	S					W	
	Blank = Round S = Square	Blank = 24/19/13W Selectable	Blank = 3000K/4000K/5000K Selectable	Blank = 120-277V, 0-10V Dimming	Blank = Flat Top (Round & Square) D = Dome (Round Only)	Blank = Bronze W = White B = Black	Blank = Integrated On/Off Photocell (Standard)