



Color: Seashell

Weight: 5.3 lbs

Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Type	Constant	Watts	22/17/11W
120V	0.20A/0.15A/0.10A	Color Temp	3500K/4000K/5000K
208V	0.11A/0.10A/0.07A	Color	84-86 CRI
240V	0.10A/0.08A/0.06A	Accuracy	
277V	0.09A/0.07A/0.05A	L70 Lifespan	100,000 Hours
Input Watts	11.8-23.4W	Lumens	1,503-3,040 lm
		Efficacy	125.3-133.3 lm/W

Technical Specifications

Field Adjustability

Field Adjustable:

Field Adjustable Light Output:
2 ft: 22W/17W/11W (factory default 22W)
Color temperature selectable by 3500K, 4000K and 5000K (factory default 4000K)

Compliance

UL Listed:

Suitable for damp locations

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.
DLC Product Code: S-VRQUXD

Electrical

Driver:

22W: Class P, Constant Current, 120-277V, 50/60 Hz,
120V: 0.20A, 208V: 0.11A, 240V: 0.10A, 277V: 0.09A

17W: Class P, Constant Current, 120-277V, 50/60 Hz,
120V: 0.15A, 208V: 0.10A, 240V: 0.08A, 277V: 0.07A

11W: Class P, Constant Current, 120-277V, 50/60 Hz,
120V: 0.10A, 208V: 0.07A, 240V: 0.06A, 277V: 0.05A

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

THD:

1.29% at 120V, 9.1% at 277V

Power Factor:

99.8% at 120V, 96.6% at 277V

Surge Protection:

DM: 1Kv
CM: 2Kv

Battery Backup:

Battery backup will operate the fixture for 90 minutes if power fails. Wired for 120-277V.

Battery Backup Light Loss Factor:

22W: 0.39
17W: 0.52
11W: 0.78

Performance

Lifespan:

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

LED Characteristics

LEDs:

Long-life, high-efficiency, surface-mount LEDs

Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

Construction

Cold Weather Starting:

The minimum starting temperature is 0°C (32°F)

Maximum Ambient Temperature:

Suitable for use in up to 40°C (104°F)

Technical Specifications (continued)**Housing:**

Sustainable, biocomposite resin manufactured with coffee chaff, waste seashells, and recycled plastic.

Reflector:

Refractive Lens

Lens:

Diffused Polymethyl Methacrylate (PMMA)

Mounting:

Surface mount and VHOOKs standard. Fixtures designed for end to end connection. Through wiring kit not included.

Finish:

Naturally occurring, beige, speckled pattern

Green Technology:

Mercury free. Made with RoHS-compliant components and biorenewable components.

Sensor Specifications**Operating Voltage:**

DC Input: 10.5-15V

Current > 50mA

Operating Temperature:

Ta: -31° F (-35° C)* ~ +122° F (+50° C)

Sensor Warranty:

5-year sensor warranty

Sensitivity Setting:

25%/50%/75%/100%

Standby Period:

0s/10s/30s/1min/5min/10min/30min/60min/+∞

Daylight:

2Lux/10Lux/30Lux/50Lux/80Lux/120Lux/Disable

Hold Time:

5s/30s/1min/3min/5min/10min/20min/30min

Standby Dimming:

10%/20%/30%/50%

Detection Angle:

30° to 150° without glass cover

Detection Distance:

Radius 9.84-22.96ft(3-7m)

Mounting Height:

Max 49ft.(15m)

Remote Control:

Adjust settings using remote control (catalog# MSR1). Only available with 0-10V dimming driver options. [Remote control available here.](#)


Other**Warranty:**

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

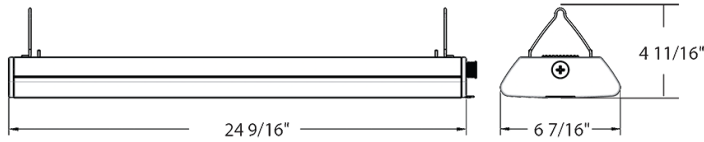

Features

- Affordable, easy to use LED wrap fixture
- 0-10V dimming, standard
- 100,000-Hour LED lifespan

Ordering Matrix

Family	Size (Wattages)	Color Temp	Finish	Voltage	Options
CW	2				/MVS/E
	2 = 2 ft (22/17/11W) 4 = 4 ft (44/33/22W)	Blank = 3500K/4000K/5000K CCT Adjustable	Blank = Seashell	Blank = 120-277V, 0-10V Dimming	Blank = No Option /E = Battery Backup /MVS = Microwave Occupancy Sensor /MVS/E = Microwave Occupancy Sensor w/Battery Backup