



Color: Black

Weight: 0.4 lbs

Project:

Type:

Prepared By:

Date:

Driver Info

Type	Constant Current
120V	0.11A
208V	N/A
240V	N/A
277V	N/A
Input Watts	12W

LED Info

Watts	12W
Color Temp	3000K
Color Accuracy	90 CRI
L70 Lifespan	50,000 Hours
Lumens	750 lm
Efficacy	62.5

Technical Specifications

Performance

Description:

The DISK34 is an ultra low profile surface-mount, ideal solution for new construction and retrofit applications. IC rated for direct contact with insulation, air tight, suitable for indoor applications in dry and damp environments. Mounting kit for recessed housing sold separately.

Product Type:

Surface & Flush Mounts

Input Wattage:

12W

Lumens (Nominal):

750lm

Efficacy:

62.5lm/W

L70 Lifespan:

50,000-Hour LED lifespan based on IES LM-70 results

Compliance

UL Listed:

Suitable for damp locations

UL Classified:

Yes

Energy Star Approved:

ENERGY STAR® Version 2.2 Certified

Energy Star ID:

2387695

Fixture Rating:

Open

IC Rated:

Suitable for direct contact with insulation

Electrical

Dimming Driver:

TRIAC compatible dimmer with dimming as low as 5%

Power Factor:

0.9

Flicker:

<30%

Input Voltage:

120V

Operating Frequency:

60Hz

Construction

Material:

Aluminum

Trim Style:

Smooth Trim

Shape:

Round

Mounting:

Surface mount

Operating Temperature:

-30°C (-22°F) to 40°C (104°F)

Optical

Beam Angle:

110°

LED Characteristics

R9 Value:

High color performance with R9 greater than 50

Other

Warranty:


RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Technical Specifications (continued)

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

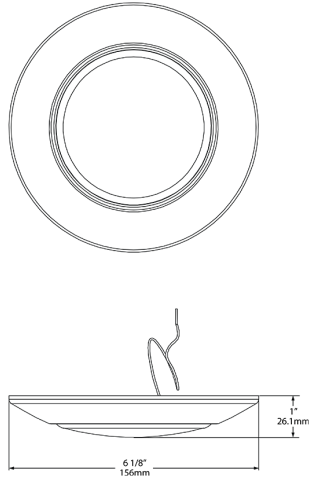

Features

- Super low profile backlit LED with driverless design
- Stamped aluminum housing
- New construction or retrofit applications
- Simple and quick installation from below the ceiling
- Installs on standard 4" and 6" junction boxes
- Can be retrofitted to existing downlight housings with option accessory
- Suitable for Damp locations
- Dimmable down to 5% on compatible dimmers
- 5-Year, limited warranty

Ordering Matrix

Family	Size	Shape	Wattage	CRI/Color Temp	Voltage	Finish	Trim	
DSK34	-	4	R	12	930	120	B	S
	4 = 4" 6 = 6"	R = Round	12 = 12W 14 = 14W 16 = 16W 16.5 = 16.5W	950 = 90 CRI, 5000K 940 = 90 CRI, 4000K 935 = 90 CRI, 3500K 930 = 90 CRI, 3000K 927 = 90 CRI, 2700K	120 = 120V	W = White B = Black BR = Bronze BN = Brushed Nickel	S = Smooth	