



Affordable, high-performance, low-maintenance LED doorway light. Suitable for mounting heights up to 10', and replaces 70W high pressure sodium. 100,000-Hour LED lifespan. 5-year, no-compromise warranty.

Color: White

Weight: 2.9 lbs

| | |
|---------------------|--------------|
| Project: | Type: |
| Prepared By: | Date: |

| Driver Info | | LED Info | |
|-------------|------------------|----------------|---------------|
| Type | Constant Current | Watts | 12W |
| 120V | 0.3A | Color Temp | 3000K (Warm) |
| 208V | N/A | Color Accuracy | 84 CRI |
| 240V | N/A | L70 Lifespan | 100,000 Hours |
| 277V | N/A | Lumens | 876 lm |
| Input Watts | 14.2W | Efficacy | 61.7 lm/W |

Technical Specifications

Compliance

UL Listed:

Suitable for wet locations as downlight. Suitable for mounting within 4ft (1.2m) of the ground.

IP Rating:

Ingress protection rating of IP66 for dust and water

ADA Compliant:

ENTRA™ is ADA Compliant

LED Characteristics

LED:

12W multi-chip, long life LED

Color Stability:

LED color temperature is warrantied to shift no more than 200K in color temperature over a 5-year period

Color Consistency:

3-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

Performance

Lifespan:

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

Wattage Equivalency:

50W HPS

Construction

Cold Weather Starting:

The minimum starting temperature is -40°C (-40°F)

Maximum Ambient Temperature:

Suitable for use in up to 40°C (104°F)

Back Housing:

Die-cast aluminum

Lens/Housing Cover:

Vandal resistant polycarbonate molded housing cover and lens

Mounting:

Heavy die cast aluminum with 1/2" back knockout and mounting template for mounting to 4" box

Recommended Mounting Height:

Up to 10 ft

Reflectors (2):

White aluminum reflector topped with vacuum-metalized polycarbonate LED reflector

Gaskets:

High-temperature silicone

Finish:

Formulated for high durability and long-lasting color

Green Technology:

Mercury and UV free. RoHS-compliant components.

Other

Patents:

The design of the ENTRA™ is protected by patents pending in US, Canada, China, Taiwan and Mexico

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Technical Specifications (continued)

Electrical

Driver:

Constant Current, Class 2, 100-277V, 50/60Hz, 4kV
Surge Protection, 350mA, 100-240VAC: 0.3 - 0.15 A,
277VAC: 0.15 A, Power Factor: 98.6%.


THD:

10.5 at 120V

Photocell:

120V Button photocell included. Photocell is only compatible with 120V.

Dimensions

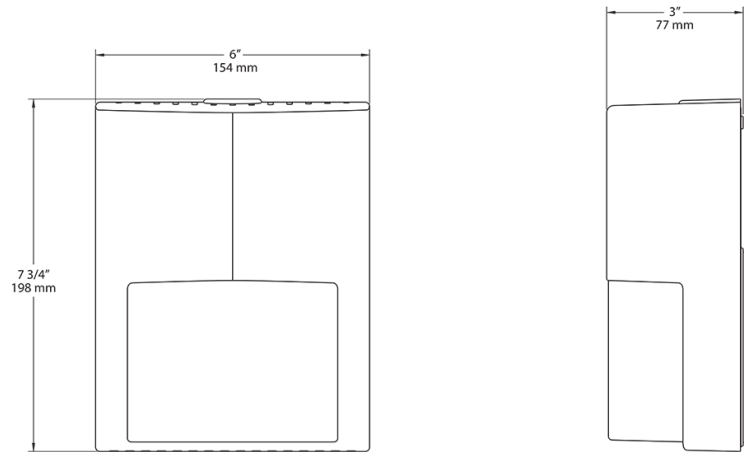

Features

- Save over \$700 in energy costs over life of fixture
- Equivalent to 70W high pressure sodium
- Durable vandal-resistant polycarbonate housing
- Low-profile and ADA compliant
- 100,000-hour LED lifespan
- 5-Year, No-Compromise Warranty

Ordering Matrix

| Family | Wattage | Color Temp | Finish | Options | Other Options |
|--------|----------|---|-----------------------------|--|------------------|
| ENTRA | 12 | Y | W | /PC | |
| | 12 = 12W | Blank = 5000K Cool N = 4000K Neutral Y = 3000K Warm | Blank = Bronze W = White | Blank = No Options /PC = 120V Button /PC2 = 277V Button /PCS = 120V Swivel /PCS2 = 277V Swivel | Blank = Standard |