EXIT34/E





Project:	Туре:
Prepared By:	Date:

Technical Specifications

Performance

Product Type:

Exit Sign

Description:

Ultra-economy exit sign with universal faces with red letters and 90-minutes of emergency backup.

Input Wattage:

1W @120V and 277V

Electrical

Power Factor:

≥0.9 @ 120V; ≥0.4 @ 277V

Input Voltage:

Dual 120/277Vage

Operating Frequency:

60Hz

Input Current @ 120V (mA):

90mA

Input Current @ 277V (mA):

90mA

Operating Temperature:

32°F to 122°F (0°C to 50°C)

Emergency Illumination:

90 minutes

Battery Backup:

Battery Backup

Battery Type:

Nickel Cadmium

Battery Voltage:

1 2V

Recharge Time Required:

24-hours

Storage Temperature:

68°F to 86°F (20°C to 30°C)

Storage Shelf Life:

3 years before the initial charge. 5 years after initial charge.

Self Diagnostics:

Manual Test

Installation

Mounting Method: Back/Top/End

Mounting Type:

Wall/Ceiling Mount

Cold Weather Rated:

No

Construction

Shape:

Rectangle

Housing Material:

Thermoplastic

Panel Material:

Thermoplastic

Panel Color:

White

Letter Color:

Red

Housing Finish:

White

Number of Faces:

Universal Single/Double Face

Sign Format:

Stencil

Remote Capacity:

No Remote Capacity

EXIT34/E



Technical Specifications (continued)

Compliance

Listings:

UL924 Listed, NFPA 101 (current Life Safety Code), NEC and OSHA illumination standards

Environment:

Suitable for indoor use in dry and damp environments

IP Rating:

Indoor

Model Number for Certification:

EZRXTEU2RWEM-V2

T20 Compliant:

Can be used to conform with the requirements of California Title 20

California Title 24 JA8 Compliant:

Not applicable

California Energy Commission (CEC) Status:

Lawful for Sales in California

FCC:

Complies with Part 15B of the FCC Rules

Other

5 Yr Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at <u>rablighting.com/warranty</u>.

Battery is prorated.


Note:

All values are typical (tolerance +/- 10%)

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.



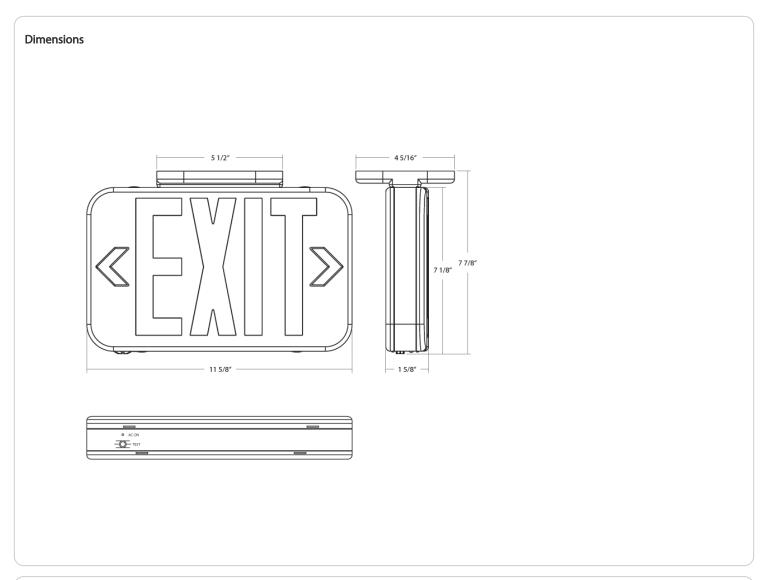

rdering Ma	atrix			
Family	Face	Exit Sign Letter Color	Housing	Battery Backup
EXIT34				/E
	Blank = Universal Faces	Blank = Red G = Green RG = Red/Green Selectable	Blank = White Housing	Blank = No Battery Backup /E = Battery Backup