



Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Type	Constant Current	Watts	17W
120V	0.20A	Color Temp	4000K (Neutral)
208V	0.10A	Color Accuracy	82 CRI
240V	0.10A	L70 Lifespan	60,000 Hours
277V	0.10A	Lumens	1,978 lm
Input Watts	16.9W	Efficacy	116.8

Technical Specifications

<p>Compliance</p> <p>UL Listed: Suitable for damp locations</p> <p>CCEA Compliant: Luminaire Requirements used in Environmental Air Space per the electrical code specification of the City of Chicago</p> <p>Trade Agreements Act Compliant: This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act</p> <p>DLC Listed: This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements. DLC Product Code: PAIV3J6Y</p> <p>Other</p> <p>Note: All values are typical (tolerance +/- 10%)</p>	<p>Warranty: RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.</p> <p>Buy American Act Compliance: RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.</p> <p>Performance</p> <p>Lifespan: 60,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations</p> <p>Wattage Equivalency: Equivalent to (4)F32T8 or (4)F28T5</p> <p>Construction</p> <p>Maximum Ambient Temperature: Suitable for use in up to -30°C (-22°F) to 50°C(122°F)</p> <p>IC Rated: Suitable for insulated ceilings</p>	<p>Lens: Frosted polystyrene</p> <p>Mounting: Recessed ceiling</p> <p>Housing: Lightweight aluminum housing, steel pan and junction box</p> <p>Installation: Standard integral T-bar clips secure the fixture to T-bars and prevent T-system separation</p> <p>Finish: Formulated for high durability and long-lasting color</p> <p>Green Technology: Mercury and UV free. RoHS-compliant components.</p> <p>LED Characteristics</p> <p>LEDs: Long-life, high-efficacy, surface-mount LEDs</p> <p>Electrical</p> <p>Driver: Constant Current, Class 2, 50/60 Hz, 120-277V, 120V: 0.20A, 208V: 0.10A, 240V: 0.10A, 277V: 0.10A</p>
--	---	---

Technical Specifications (continued)

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

THD:

8.31% at 120V, 8.2% at 277V

Power Factor:

98.5% at 120V, 94.6% at 277V


Battery Backup:

Battery backup will operate the fixture for 90 minutes if power fails. Wired for 120-277V.

Battery Backup Light Loss Factor:

0.75

Dimensions

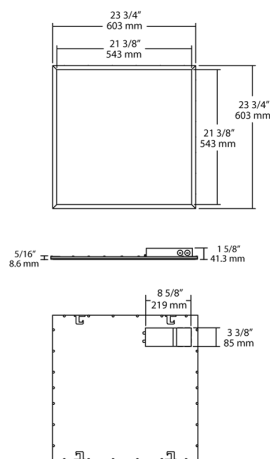

Features

Direct Connect to the Lightcloud Blue mobile app via Bluetooth, no Gateway or Hub required

Use mobile device to configure features for On/Off Control, Dim Level, Schedules, Scenes, and more.

Meets Luminaire Level Lighting Control (LLC) requirements

Integrated passive infrared or microwave sensor for added savings

Use mobile device to configure sensor settings for sensitivity, timeout and actions.

Includes emergency battery backup

Ordering Matrix

Family	Size	Wattage	Color Temp	Dimming (standard)	Control Options	Other Options	
EZPAN	2X2	–	17	N	/D10	/LCB	/E2
	2X4 = 2' x 4'	17 = 17W	Blank = 5000K Cool	/D10 = 0-10V Dimming	Blank = No Sensor	Blank = None	
	2X2 = 2' x 2'	30 = 30W	N = 4000K Neutral		/LC = Lightcloud® Controller	/E2 = Battery Backup	
	1X4 = 1' x 4'	40 = 40W	YN = 3500K Warm Neutral		/LCB = Lightcloud® Blue Enabled		
		50 = 50W	Y = 3000K Warm		/LCBS = Lightcloud® Blue Enabled w/ PIR Sensor		
					/LCBS/MVS = Lightcloud® Blue Enabled w/ MVS Sensor		