

Premium, linear high bay available in five sizes/wattages. Ultra-high efficacy. Designed to be ecofriendly

Color: White/aluminum

Weight: 22.4 lbs

**Project:**

**Type:**

**Prepared By:**

**Date:**

### Driver Info

Type	Constant Current
120V	3.42A
208V	1.98A
240V	1.71A
277V	1.48A
Input Watts	385W

### LED Info

Watts	400W
Color Temp	5000K (Cool)
Color Accuracy	82.7 CRI
L70 Lifespan	100,000 Hours
Lumens	54,007 lm
Efficacy	140.26

## Technical Specifications

### Compliance

#### UL Listed:

Suitable for damp locations

#### IESNA LM-79 & lm-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA lm-79 and lm-80

#### DLC Listed:

This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.  
DLC Product Code: S-B6PLJ4

### Performance

#### Lifespan:

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

#### Wattage Equivalency:

Equivalent to 1,000W Metal Halide

### LED Characteristics

#### LEDs:

Long-life, high-efficacy, surface-mount LEDs

#### Color Consistency:

3-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

#### Color Stability:

LED Color temperature is warranted to shift no more than 200K in color temperature over a 5-year period

#### Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

### Electrical

#### Driver:

Constant Current, Class 2, 120-277V, 50/60Hz, 120V: 3.42A, 208V: 1.98A, 240V: 1.71A, 277V 1.48A

#### THD:

2.09% at 120V, 9.18% at 277V

#### Power Factor:

99.87% at 120V, 96.2% at 277V

#### Surge Protection:

6kV

#### Battery Backup:

Battery backup will operate the fixture for 90 minutes if power fails. Wired for 120-277V.

#### Battery Backup Light Loss Factor:

0.0661

### Construction

#### Cold Weather Starting:

The minimum starting temperature is -20°C (-4°F)

#### Maximum Ambient Temperature:

Suitable for use in up to 45°C (113°F)

#### Housing:

Extruded aluminum

#### Lens:

Polycarbonate lens

#### Reflector:

Polyethylene Terephthalate (PET)

#### Mounting:

V hooks (chain by others)

## Technical Specifications (continued)

### Lightcloud

#### Lightcloud Controller Installed:

Integrated/embedded networked lighting control, luminaire-level lighting control. Fixture, Zone, and plug-load control from one powerful device. LLLC - capable of switching, 0-10V dimming, power/energy monitoring. Can also be used to extend the range of the Lightcloud mesh network communication protocols. Offers the capability to set the maximum light output to a less-than-maximum state of an individual luminaire at the time of installation or commissioning. The High-End trim functionality is field reconfigurable via the Lightcloud mesh network communication protocols. The Lightcloud controller can be attached to the fixture, junction box, or electrical panel.

DLC system - N1XMLOEATBA

[Learn more about Lightcloud.](#)

### Other


#### Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

#### Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

## Dimensions

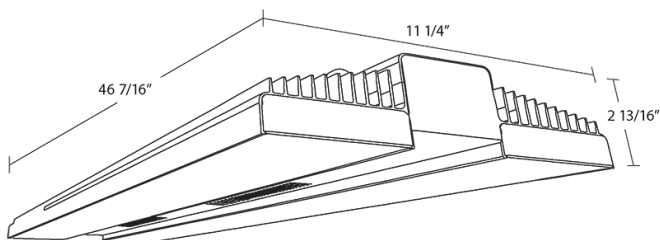

## Features

- 100,000-Hour LED lifespan
- DLC Premium Listed
- 0-10V dimming, standard
- 5-Year, No-Compromise Warranty

## Ordering Matrix

Family	Wattage (Length)	Color Temp	Voltage	Options
RAIL	400			/LC/E
	<b>90</b> = 90W (13") <b>150</b> = 150W (20") <b>175</b> = 175W (23") <b>225</b> = 225W (31") <b>400</b> = 400W (46")	<b>Blank</b> = 5000K <b>N</b> = 4000K	<b>Blank</b> = 120-277V, 0-10V Dimming <b>/480</b> = 480V, 0-10V Dimming	<b>Blank</b> = No Option <b>/LC</b> = Lightcloud® Controller, 120-480V <b>/LCS</b> = Lightcloud® Sensor, 120-277V <b>/PIR</b> = Passive Infrared Sensor, 120-277V <b>/MVS</b> = Microwave Occupancy Sensor, 120-277V <b>/E</b> = Battery Backup, 120-277V <b>/LC/E</b> = Lightcloud® Controller w/ Battery Backup, 120-277V <sup>1</sup> <b>/LCS/E</b> = Lightcloud® Sensor w/ Battery Backup, 120-277V <sup>1</sup> <b>/PIR/E</b> = Passive Infrared Sensor w/ Battery Backup, 120-277V <b>/MVS/E</b> = Microwave Occupancy Sensor w/ Battery Backup, 120-277V

<sup>1</sup> Available in 150W, 175W, 225W and 400W only