



The ultra-economy RBAY17 high bay is offered in 3 sizes with field-adjustable wattage and CCT to give you 9 SKUs in 1.

Color: White

Weight: 5.6 lbs

Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Type	Constant Current	Watts	130/100/80W
120V	1.06A/0.83A/0.68A	Color Temp	Field Adjustable 3500/4000/5000K
208V	0.61A/0.48A/0.39A	Color Accuracy	82-85 CRI
240V	0.53A/0.42A/0.34A	L70 Lifespan	100,000 Hours
277V	0.46A/0.36A/0.29A	Lumens	12,506-19,432 lm
Input Watts	130/100/80W	Efficacy	149.3-153.4 lm/W

Technical Specifications

Field Adjustability

Field Adjustable:

Field Adjustable Light Output:
130W/100W/80W (factory default 130W)
Color temperature selectable by 5000K, 4000K and 3500K (factory default 4000K)

Compliance

UL Listed:

Suitable for damp locations

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

IP Rating:

IP20

DLC Listed:

This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.
DLC Product Code: S-ZU7Y5J

LED Characteristics

LEDs:

Long-life, high-efficacy, discrete, surface-mount LEDs

Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

Performance

Lifespan:

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

Wattage Equivalency:

Equivalent to 400W Metal Halide

Electrical

Driver:

130W: Constant Current, Class 1, 120-277V, 50/60Hz, 120V: 1.06A, 208V: 0.63A, 240V: 0.54A, 277V 0.47A
100W: Constant Current, Class 1, 120-277V, 50/60Hz, 120V: 0.82A, 208V: 0.48A, 240V: 0.42A, 277V 0.36A
80: Constant Current, Class 1, 120-277V, 50/60Hz, 120V: 0.66A, 208V: 0.38A, 240V: 0.33A, 277V 0.29A

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

THD:

5.01% at 120V, 8.0% at 277V

Power Factor:

99.6% at 120V, 91.8% at 277V

Battery Backup:

Battery backup will operate the fixture for 90 minutes if power fails. Wired for 120-277V.

Battery Backup Light Loss Factor:

0.07

Surge Protection:

L-N: 6kV
L/N-GND: 6kV

Construction

Cold Weather Starting:

The minimum starting temperature is 0°C (32°F)

Maximum Ambient Temperature:

Suitable for use in up to 60°C (140°F)

Lens:

Polycarbonate lens

Reflector:

Polycarbonate

Housing:

Die-cast aluminum

Technical Specifications (continued)

Cord & Plug:

8 ft cord and NEMA 5-15P plug for 120V only

Finish:

Formulated for high durability and long-lasting color

Green Technology:

Mercury and UV free. RoHS-compliant components.

Installation

Mounting:

Comes standard with V-hooks for chain mounting.

Accessories available for pendant and surface mounting ([purchased separately](#)).

Sensor Settings

Remote Control Accessory:

Adjust settings using remote control (catalog# MSR1). Only available with 0-10V dimming driver options. [Remote control available here.](#)

Other


5 Yr Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

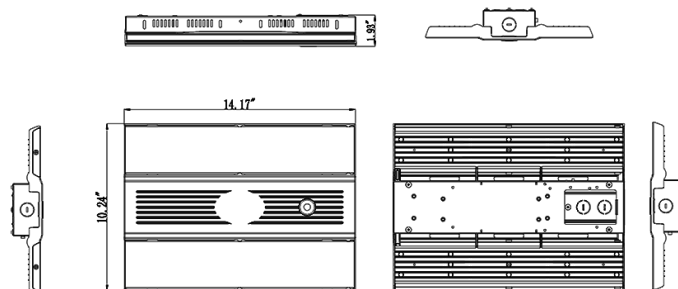

Features

- 100,000-Hour LED lifespan
- DLC Premium Listed
- 0-10V dimming, standard
- 5-Year, limited warranty

Ordering Matrix

Family	Size/Wattage	Color Temp	Mounting	Finish	Driver	Options
RBAY17	S					/E/8CP
	M = 20" (260/220/160W) L = 39" (400/320/260W) S = 14" (130/100/80W)	Blank = 3500/4000/5000K	Blank = V-Hook/Chain	Blank = White	Blank = 120-277V, 0-10V Dimming /480 = 480V, 0-10V Dimming	/E/8CPT4 = Battery Backup w/8' Cord & 480V Plug /E/8CP2 = Battery Backup w/8' Cord & 277V Plug /E/8CP = Battery Backup w/8' Cord & 120V Plug /E/8C = Battery Backup w/8' Cord /8CPT4 = 8' Cord & 480V Plug /8CP2 = 8' Cord & 277V Plug /8CP = 8' Cord & 120V Plug /8C = 8' Cord /LCBS/E = Lightcloud Blue w/PIR Sensor and Battery Back Up /LCBS = Lightcloud Blue w/PIR Sensor /E = Battery Backup ¹ Blank = No Option

¹ Available only for 120-277V models