



<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Type	Constant Current	Watts	40/30/20W
120V	0.33A/0.25A/0.17A	Color Temp	3500K/4000K/5000K
208V	0.19A/0.14A/0.10A	Color Accuracy	83-84 CRI
240V	0.17A/0.13A/0.08A	L70 Lifespan	50,000 Hours
277V	0.14A/0.11A/0.07A	Lumens	3,155-6,174 lm
Input Watts	20.1-42.6W	Efficacy	140.2-163.7 lm/W

## Technical Specifications

### Field Adjustability

#### Field Adjustable:

Field Adjustable Light Output:  
40W/30W/20W (factory default 40W)  
Color temperature selectable by 5000K, 4000K and 3500K (factory default 4000K)

### Compliance

#### UL Listed:

Suitable for damp locations

#### DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.  
DLC Product Code: S-CDUVBW (Direct Linear Ambient Luminaires)  
DLC Product Code: S-K82UP3 (Low-Bay Luminaires for Commercial and Industrial Buildings)  
DLC Product Code: S-LSEM36 (Stairwell and Passageway Luminaires)

### LED Characteristics

#### LEDs:

Long-life, high-efficiency, discrete, surface-mount LEDs

### Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

### Color Consistency:

4-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

### Performance

#### Lifespan:

50,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

#### Wattage Equivalency:

40W: (3) F32T8  
30W: (2) F32T8  
20W: (1) F32T8

### Electrical

#### Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

#### THD:

6.22% at 120V, 14.88% at 277V

#### Power Factor:

99.79% at 120V, 98.26% at 277V

### Surge Protection:

L-N 1KV, L/N-G 2KV

### Battery Backup:

Battery backup will operate the fixture for 90 minutes if power fails. Wired for 120-277V.

### Battery Backup Light Loss Factor:

40W: 0.243  
30W: 0.32  
20W: 0.454

### Construction

#### Cold Weather Starting:

The minimum starting temperature is 0°C (32°F)

#### Maximum Ambient Temperature:

Suitable for use in up to 60°C (140°F)

#### Lens:

Polycarbonate lens

#### Housing:

Sheet metal

#### Mounting:

Surface mounting standard. V-Hooks and Chain mounting available (ordered separately, SR VHOOK KIT).

## Technical Specifications (continued)

**Green Technology:**

Mercury and UV free. RoHS-compliant components.

**Finish:**

Formulated for high durability and long-lasting color

**Sensor Specifications****Remote Control Accessory:**

Adjust settings using remote control (catalog# MSR1). Only available with 0-10V dimming driver options. [Remote control available here.](#)

**Sensor Sensitivity:**

Low/Medium/High

**Occupancy Timeout:**

1 minute to 240 minutes

**Inside Occupancy Mode:**

Set vacant dim level from off and any dim level

**Daylight Threshold:**

150lux to 1500lux

**Sensor Warranty:**

5-year sensor warranty

**Mounting Height:**

Max 39.37ft.(12m)

**Other****5 Yr Limited Warranty:**

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

**Accessories:**

Suspended Mounting Kit: SR VHOOK KIT

Surface Mount Kit: SR JOIN KIT

**Note:**

All values are typical (tolerance +/- 10%)


**Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

**Lightcloud****Lightcloud Blue Sensor Installed:**

Occupancy, vacancy, and closed loop daylight harvesting in one versatile sensor. In addition control any fixture in your Lightcloud Blue integrated/embedded networked lighting luminaire-level control system. LLLC - capable of switching, 0-10V dimming, power/energy monitoring. Can also be used to extend the range of the Lightcloud Blue utilizing a "BLE Mesh" network communication protocols. The Lightcloud Blue sensor can be attached to the fixture provided an unobstructed view of the coverage area is available. DLC system - N1XMLOEATBA  
[Learn more about Lightcloud.](#)

**Dimensions**

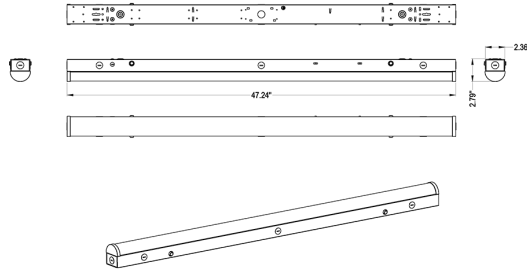

**Features**

- 50,000-Hour LED lifespan
- 120-277V standard
- 0-10V dimming, standard
- 5-Year, limited warranty

**Ordering Matrix**

Family	Size/Wattage	Color Temp	Mounting	Finish	Options
SR	4				/LCBS/MVS/E
	2 = 2ft (19/14/10W) 4L = 4ft (28/21/14W) 4 = 4ft (40/30/20W) 8 = 8ft (60/50/40W) 8H = 8ft (85/75/54W)	Blank = 3500K/4000K/5000K CCT Adjustable	Blank = J-Box Adaptor	Blank = White	Blank = No Option /E = Battery Back Up /MVS = Microwave Occupancy Sensor /PIR = Passive Infrared Occupancy Sensor /LCBS = Lightcloud® Blue Enabled w/ PIR Sensor /LCBS/MVS = Lightcloud® Blue Enabled w/ MVS Sensor /MVS/E = Microwave Occupancy Sensor w/ Battery Back Up /PIR/E = Passive Infrared Occupancy Sensor w/ Battery Back Up /LCBS/E = Lightcloud® Blue PIR Sensor w/ Battery Back Up /LCBS/MVS/E = Lightcloud® Blue MVS Sensor w/ Battery Back Up