



<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Type	Constant Current	Watts	10/8/06W
120V	0.05A/0.06A/0.08A	Color Temp	3500K/4000K/5000K
208V	0.04A/0.05A	Color Accuracy	83-85 CRI
240V	0.03A/0.04A/0.05A	L70 Lifespan	100,000 Hours
277V	0.03A/0.04A	Lumens	881-1558 lm
Input Watts	6.4-10.4W	Efficacy	137.6-152.8 lm/W

**Technical Specifications**

**Field Adjustability**

**Field Adjustable:**

Field Adjustable Light Output:  
10/8/6W (factory default 10W)  
Color temperature selectable by 3500/4000/5000 (factory default 4000K)

**Compliance**

**UL Listed:**

Suitable for damp locations

**IESNA LM-79 & LM-80 Testing:**

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA lm-79 and lm-80.

**CCEA Compliant:**

Luminaire Requirements used in Environmental Air Space per the electrical code specification of the City of Chicago

**Trade Agreements Act Compliant:**

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

**DLC Listed:**

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.  
DLC Product Code: S-LHRY68

**LED Characteristics**

**LEDs:**

Long-life, high-efficiency, discrete, surface-mount LEDs

**Color Consistency:**

4-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

**Color Uniformity:**

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

**Performance**

**Lifespan:**

100,000-Hour LED lifespan based on IES lm-80 results and TM-21 calculations

**Electrical**

**Driver:**

Constant Current, Class 2, 120-277V, 50/60 Hz:  
10W: 120V: 0.083A, 208V: 0.048A, 240V: 0.042A, 277V: 0.036A  
8W: 120V: 0.667A, 208V: 0.038A, 240V: 0.333A, 277V: 0.029A  
6W: 120V: 0.050A, 208V: 0.029A, 240V: 0.025A, 277V: 0.022A

**Dimming Driver:**

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

**THD:**

6.37% at 120V, 10.43% at 277V

**Power Factor:**

99.4% at 120V, 92.4% at 277V

**Aux Power Supply:**

Yes

**Dim to Off:**

Yes

**Surge Protection:**

DM: 1 kV  
CM: 2 kV

**Construction**

**Cold Weather Starting:**

The minimum starting temperature is -4°F (-20°C)

**Maximum Ambient Temperature:**

Suitable for use in up to 104°F (40°C)

**Lens:**

Polycarbonate lens

**Technical Specifications (continued)**

**Housing:**

Metal

**Reflector:**

Metal

**Green Technology:**

Mercury and UV free. RoHS-compliant components.

**Finish:**

Formulated for high durability and long-lasting color

**Installation**

**Mounting:**


Surface mounting standard. V-Hooks and Chain mounting available (ordered separately, SR VHOOK KIT).

**Other**

**5-Year Limited Warranty:**

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

**Dimensions**

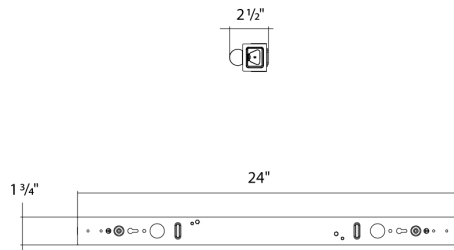

**Features**

- 100,000-Hour LED lifespan
- 120-277V standard
- 0-10V dimming, standard
- 5-Year, limited warranty

Ordering Matrix

Family	Size/Wattage	Color Temp	Finish	Driver	Controls	Battery Backup
STRP	2 2 = 2 ft, 10/8/6W 2H = 2 ft, 20/15/10W 4 = 4 ft, 20/15/10W 4H = 4 ft, 40/30/20W	Blank = 3500/4000/5000K CCT Adjustable	Blank = White	Blank = 120-277V, 0-10V Dimming	Blank = None /MVS = Microwave Occupancy Sensor /PIR = Passive Infrared Occupancy Sensor /LCBS = Lightcloud Blue w/PIR Sensor /LCBS/MVS = Lightcloud Blue w/MVS Sensor	Blank = None /E = Battery Backup <sup>1</sup>

<sup>1</sup> Only available for 4 ft models