


<b>Project:</b>	<b>Type:</b>	<b>Prepared By:</b>	<b>Date:</b>
-----------------	--------------	---------------------	--------------

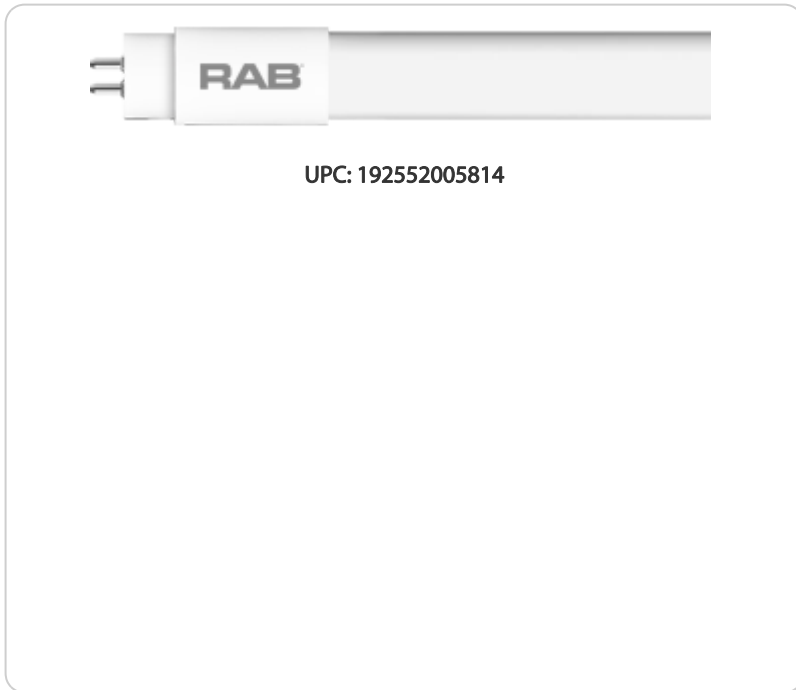

**Features and Benefits**

Replacement for conventional fluorescent T8 and T12 linear tubes

Technical Specifications		
<b>Performance</b> <hr/> <b>Product Type:</b> Linear  <b>Input Wattage:</b> 22W  <b>Lumens (Nominal):</b> 3,400lm  <b>Efficacy:</b> 131lm/W  <b>L70 Lifespan:</b> 50,000-Hour LED lifespan based on IES LM-70 results	<b>Color Accuracy (CRI):</b> ≥80 CRI  <b>Construction</b> <hr/> <b>Bulb Shape:</b> T5 4FT  <b>Base Type:</b> G5  <b>Endcap Material:</b> Plastic  <b>Enclosure Material:</b> Polycarbonate and Aluminum	<b>Operating Temperature:</b> -20°C to 45°C (-4°F to 113°F)  <b>Input Voltage:</b> Driver Dependent  <b>Operating Frequency:</b> 50/60Hz  <b>Dimming:</b> Yes with 0-10V dimmer. See Dimmer Compatibility List.  <b>Other</b> <hr/> <b>Warranty:</b> RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at <a href="http://rablighting.com/warranty">rablighting.com/warranty</a> .
<b>Compliance</b> <hr/> <b>UL Listed:</b> Suitable for damp locations  <b>Enclosed Fixtures:</b> Suitable for use in enclosed fixtures  <b>LED Characteristics</b> <hr/> <b>Color Temperature:</b> 4000K	<b>Optical</b> <hr/> <b>Beam Angle:</b> 145°  <b>Electrical</b> <hr/> <b>THD:</b> 20%  <b>Power Factor:</b> 0.9	

**Minimum Compartment Size**

Length x Width x Height [in]	Lamp Quantity
20	1

**Case and Pallet Dimensions**

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	24	6.7	5.1	7
PALLET	48	48.82	40.16	40.94

**Dimension**

