



Color: Bronze

Weight: 5.1 lbs

Project:

Type:

Prepared By:

Date:

Driver Info

| | |
|-------------|-------------------|
| Type | Constant Current |
| 120V | 0.26A/0.17A/0.09A |
| 208V | 0.15A/0.10A/0.06A |
| 240V | 0.13A/0.09A/0.06A |
| 277V | 0.12A/0.09A/0.05A |
| Input Watts | 11.3-31.2W |

LED Info

| | |
|----------------|------------------|
| Watts | 30/20/10W |
| Color Temp | 3000/4000/5000K |
| Color Accuracy | 83-85 CRI |
| L70 Lifespan | N/A |
| Lumens | 1,584-4,588 lm |
| Efficacy | 136.6-152.5 lm/W |

Technical Specifications

Field Adjustability

Field Adjustable:

Field Adjustable Light Output:
30W/20W/10W (factory default: 30W)
Color Temperature Selectable:
3000K, 4000K and 5000K (factory default:4000K)
Photocell Selectable:
Built-in on/off photocell (factory default: off)

Compliance

UL Listed:

Suitable for wet locations

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

IP Rating:

Ingress protection rating of IP65 for dust and water

Trade Agreements Act Compliant:

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

DLC Listed:

This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.
DLC Product Code: S-S1GLPF (Stairwell and Passageway Luminaires)
DLC Product Code: S-8X7YT7 (Fuel Pump Canopy Luminaires)

Electrical

Driver:

Constant Current, Class 1, 120-277V, 50/60 Hz:
30W: 120V: 0.26A, 208V: 0.15A, 240V: 0.13A, 277V: 0.12A
20W: 120V: 0.17A, 208V: 0.10A, 240V: 0.09A, 277V: 0.09A
10W: 120V: 0.09A, 208V: 0.06A, 240V: 0.06A, 277V: 0.05A

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

Aux Power Supply:

Yes

Dim to Off:

Yes

Surge Protection:

L/N: 4 kV, L/N-PE: 6 kV

Photocell:

Built-in photocell included with on/off switch

LED Characteristics

LEDs:

Long-life, high-efficacy, surface-mount LEDs

Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

Performance

Lifespan:

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

Construction

Cold Weather Starting:

The minimum starting temperature is -40°F (-40°C)

Maximum Ambient Temperature:

Suitable for use in up to 104°F (40°C)

Lens:

Polycarbonate clear drop lens

Gaskets:

Ethylene Propylene Diene Monomer (EPDM)

Technical Specifications (continued)

Housing:

Die-cast aluminum

Reflector/Tray:

Aluminum

Finish:

Formulated for high durability and long-lasting color

Green Technology:


Mercury and UV free. RoHS-compliant components.

Other

5-Year Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Dimensions

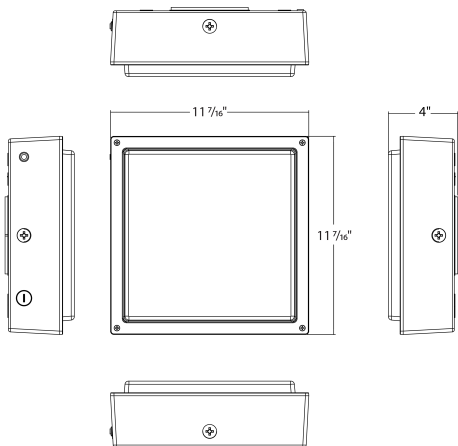

Features

- 100,000-Hour LED lifespan
- 0-10V Dimming
- IP65 Rated
- 5-Year, limited warranty

Ordering Matrix

| Family | Wattage | Color Temp | Lens | Finish | Driver | Controls | Battery Backup |
|--------|--|---|--|--------------------------------|---|---|--|
| VAN34 | 30 | | | | | | |
| | 30 = 30/20/10W 90 = 90/80/70W 60 = 60/50/40W | Blank = 3000/4000/5000K CCT Adjustable | F = Flat Lens FFR = Frosted Flat Lens FR = Frosted Drop Lens Blank = Drop Lens | W = White Blank = Bronze | Blank = 120-277V, 0-10V Dimming /480 = 480V, 0-10V Dimming | /MVS = Microwave Sensor /LCBS/MVS = Lightcloud Blue w/MVS Sensor /LC = Lightcloud Blank = On/Off Photocell | Blank = None /E = Battery Backup |