



Color: Bronze

Weight: 6.2 lbs

Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Type	Constant Current	Watts	30/20/10W
120V	0.26A/0.17A/0.09A	Color Temp	3000/4000/5000K
208V	0.15A/0.10A/0.06A	Color Accuracy	83-85 CRI
240V	0.13A/0.09A/0.06A	L70 Lifespan	N/A
277V	0.12A/0.09A/0.05A	Lumens	1,636-4,734 lm
Input Watts	11.3-31.2W	Efficacy	141-158 lm/W

Technical Specifications

Field Adjustability

**Field Adjustable:**  
Field Adjustable Light Output:  
30W/20W/10W (factory default: 30W)  
Color Temperature Selectable:  
3000K, 4000K and 5000K (factory default:4000K)  
Photocell Selectable:  
Built-in on/off photocell (factory default: off)

Compliance

**UL Listed:**  
Suitable for wet locations

**IESNA LM-79 & LM-80 Testing:**  
RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

**IP Rating:**  
Ingress protection rating of IP65 for dust and water

**DLC Listed:**  
This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.  
DLC Product Code: S-S53HPC (Stairwell and Passageway Luminaires)  
DLC Product Code: S-JMPXTV (Fuel Pump Canopy Luminaires)

Electrical

**Driver:**  
Constant Current, Class 1, 120-277V, 50/60 Hz:  
30W: 120V: 0.26A, 208V: 0.15A, 240V: 0.13A, 277V: 0.12A  
20W: 120V: 0.17A, 208V: 0.10A, 240V: 0.09A, 277V: 0.09A  
10W: 120V: 0.09A, 208V: 0.06A, 240V: 0.06A, 277V: 0.05A

**Dimming Driver:**  
Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

**Aux Power Supply:**  
Yes

**Dim to Off:**  
Yes

**Battery Backup:**  
Battery backup will operate the LED Lamp for 90 minutes if power fails. Wired for 120V-277V.

**Battery Backup Light Loss Factor:**  
0.08

**Surge Protection:**  
L/N: 4 kV, L/N-PE: 6 kV

**Photocell:**  
Bulit-in photocell included with on/off switch

**LED Characteristics**  
**LEDs:**  
Long-life, high-efficacy, surface-mount LEDs

**Color Uniformity:**  
RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

**Performance**  
**Lifespan:**  
100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

**Construction**  
**Cold Weather Starting:**  
The minimum starting temperature is 0°C (32°F)

**Maximum Ambient Temperature w/Battery Backup:**  
Suitable for use in up to 140°F(60°C)

**Lens:**  
Polycarbonate clear flat lens

**Gaskets:**  
Ethylene Propylene Diene Monomer (EPDM)

Technical Specifications (continued)

Housing:

Die-cast aluminum

Reflector/Tray:

Aluminum

Finish:

Formulated for high durability and long-lasting color

Green Technology:

Mercury and UV free. RoHS-compliant components.

Lightcloud

Lightcloud Blue:

Lightcloud Blue is a Bluetooth Mesh wireless lighting control system that allows you to control RAB's various compatible devices. With RAB's patented Rapid Provisioning technology, devices can be quickly and easily commissioned for residential and large commercial applications using the Lightcloud Blue mobile app. Each device in a system can communicate with any other device, eliminating the need for a Gateway or Hub and maximizing the control system's reach.

DLC system - N1XMLOEATBA (Interior);  
NHCZ2BIA17L (Exterior)

Learn more at [www.lightcloud.com](http://www.lightcloud.com).

Gateway Required:

No

Communication Protocol:

Bluetooth Mesh

Range:

Indoor: Up to 60 feet between standard building materials. Building materials such as brick, concrete, and steel construction may require additional Lightcloud Blue devices to extend around an obstruction; Up to 200 feet clear line of sight.

Outdoor: Up to 60 feet clear line of sight; Up to 18 feet around corners.

Spacing Criteria:

Lightcloud Blue devices should be placed within the specified range to communicate within the Bluetooth Mesh network.

Factory Reset:

Method 1: Delete from App

Open the app and access the device settings for the paired device. Be sure that the device is online and select 'Delete'. The device will flash on/off 5 times and return to full brightness.

Method 2: Manual

Press and hold down the button located at the top of the Controller for 10 seconds or until the light flashes on/off 3 times. The status indicator light will flash red to confirm it has been reset and is ready to pair to the App.

Sensor Settings

Sensor Connection Type:

RJ09

Max Mounting Height:

40 ft

Detection Range:

18 ft to 44 ft diameter mounted at 13 ft

Sensor Technology:

Microwave (MVS)

Default Setting:

Uncommissioned State:

Motion Sensitivity: High

Brightness when triggered : 100%

Hold time: 20 minutes

Standby to dim: 20%

Standby time: 1 minute

When vacant: Off

Daylight: Disabled

Commissioned State:

Once pair, the sensor will default to disabled. Once enabled the following settings apply:

Motion Sensitivity: High

Brightness when triggered: Last on status

Hold time: 20 minutes

Standby to dim: 20%

Standby time: 1 minute

When vacant: Off

Daylight: Disabled

Adjustable Sensor Settings?:

Yes, using the Lightcloud Blue mobile app

Sensing Type:

Occupancy or Vacancy (option to disable or set as an independent sensor)

Occupied Actions:

On or On at a Dim Level

Vacant Actions:

Off or On at a Dim Level

Occupancy Timeout:

1 minute to 240 minutes

Daylight Sensing:


The sensor will determine to trigger the light(s) on or not based on the daylight threshold level set in the Lightcloud Blue mobile app.

Other

5-Year Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

Dimensions

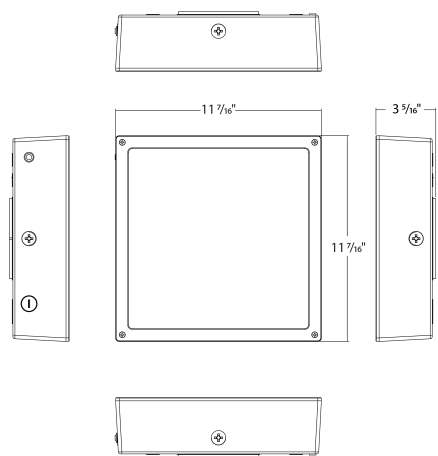

Features

- 100,000-Hour LED lifespan
- 0-10V Dimming
- IP65 Rated
- 5-Year, limited warranty

Ordering Matrix

Family	Wattage	Color Temp	Lens	Finish	Driver	Controls	Battery Backup
VAN34	30		F			/LCBS/MVS	/E
	30 = 30/20/10W 90 = 90/80/70W 60 = 60/50/40W	Blank = 3000/4000/5000K CCT Adjustable	F = Flat Lens FFR = Frosted Flat Lens FR = Frosted Drop Lens Blank = Drop Lens	W = White Blank = Bronze	Blank = 120-277V, 0-10V Dimming /480 = 480V, 0-10V Dimming	/MVS = Microwave Sensor /LCBS/MVS = Lightcloud Blue w/MVS Sensor /LC = Lightcloud Blank = On/Off Photocell	Blank = None /E = Battery Backup