



Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Type	Constant Current	Watts	60/50/40W
120V	N/A	Color Temp	3000/4000/5000K
208V	N/A	Color Accuracy	83-85 CRI
240V	N/A	L70 Lifespan	N/A
277V	N/A	Lumens	6,159-9,311 lm
Input Watts	40.7-61.3W	Efficacy	143.8-160.1 lm/W

Technical Specifications

Field Adjustability

Field Adjustable:

Field Adjustable Light Output:
60W/50W/40W (factory default: 60W)
Color Temperature Selectable:
3000K, 4000K and 5000K (factory default:4000K)
Photocell Selectable:
Built-in on/off photocell (factory default: off)

Wireless

Lightcloud Controller Installed:

LCLC/K
Fixture, Zone, and plug-load control from one powerful device. Capable of switching, 0-10V dimming, power monitoring. Can also be used to extend the range of the Lightcloud mesh network. Attach to fixture, junction box, or electrical panel. [Learn more at www.lightcloud.com](http://www.lightcloud.com)

Compliance

UL Listed:

Suitable for wet locations

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

IP Rating:

Ingress protection rating of IP65 for dust and water

DLC Listed:

This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.
DLC Product Code: S-QKL7C8 (Stairwell and Passageway Luminaires)
DLC Product Code: S-35X6Q4 (Fuel Pump Canopy Luminaires)

Electrical

Driver:

Constant Current, Class 1, 120-277V, 50/60 Hz:
60W: 480V: 0.13A
50W: 480V: 0.12A
40W: 480V: 0.10A

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

Aux Power Supply:

Yes

Dim to Off:

Yes

Surge Protection:

L/N: 4 kV, L/N-PE: 6 kV

Photocell:

Built-in photocell included with on/off switch

LED Characteristics

LEDs:

Long-life, high-efficacy, surface-mount LEDs

Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

Performance

Lifespan:

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

Construction

Cold Weather Starting:

The minimum starting temperature is -40°F (-40°C)

Maximum Ambient Temperature:

Suitable for use in up to 104°F (40°C)

Lens:

Polycarbonate clear flat lens

Technical Specifications (continued)

Gaskets:

Ethylene Propylene Diene Monomer (EPDM)

Housing:

Die-cast aluminum

Reflector/Tray:

Aluminum

Finish:

Formulated for high durability and long-lasting color

Green Technology:


Mercury and UV free. RoHS-compliant components.

Other

5-Year Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Dimensions

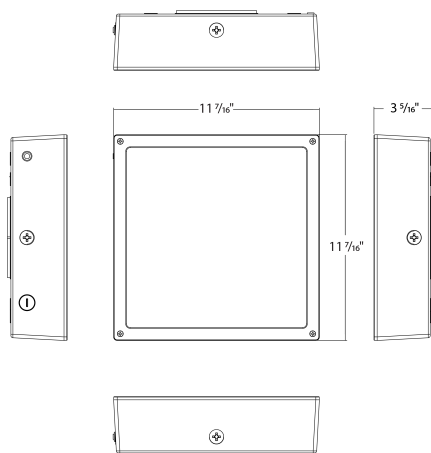

Features

- 100,000-Hour LED lifespan
- 0-10V Dimming
- IP65 Rated
- 5-Year, limited warranty

Ordering Matrix

Family	Wattage	Color Temp	Lens	Finish	Driver	Controls	Battery Backup
VAN34	60		F	W	/480	/LC	
30 = 30/20/10W 90 = 90/80/70W 60 = 60/50/40W		Blank = 3000/4000/5000K CCT Adjustable	F = Flat Lens FFR = Frosted Flat Lens FR = Frosted Drop Lens Blank = Drop Lens	W = White Blank = Bronze	Blank = 120-277V, 0-10V Dimming /480 = 480V, 0-10V Dimming	/MVS = Microwave Sensor /LCBS/MVS = Lightcloud Blue w/MVS Sensor /LC = Lightcloud Blank = On/Off Photocell	Blank = None /E = Battery Backup