

# VX/VC/VLX CEILING FIXTURES INSTALLATION INSTRUCTIONS



Thank you for buying RAB lighting fixtures. Our goal is to design the best quality products to get the job done right. We'd like to hear your comments. Call the Marketing Department at 888-RAB-1000 or email: [marketing@rabweb.com](mailto:marketing@rabweb.com)

VX 4" Box



VC Ceiling



VLX 3" Box



## IMPORTANT

**READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.**

Fixtures must be wired in accordance with the National Electrical Code and all applicable local codes. Proper grounding is required for safety. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.


**WARNING: Make certain power is OFF before installing or maintaining fixture.**

## MOUNTING


Fixture should be located on ceiling and not be recessed.  
Fixture cannot be mounted upside down in wet locations.  
For more secure installation, lag bolt box to mounting surface.

1. Attach the round 3" or 4" box to the ceiling using **Mounting Ears**.
2. Position gasket for complete seal. Seal all gaps between ceiling and fixture with weatherproof silicone sealant.
3. Fixture may be wired through back conduit entrance or either side conduit entrance for surface mounting.
4. Pull field wires into the box, place gasket over wires and connect to the supplied fixture leads.
5. Connect wires as shown in wiring section.
6. Reattach the socket holder assembly using the non-captive screws (under gasket) provided.
7. Install the lamp, globe and guard.
8. Seal all holes, plugs and conduit entrances with weatherproof silicone sealant.


VX

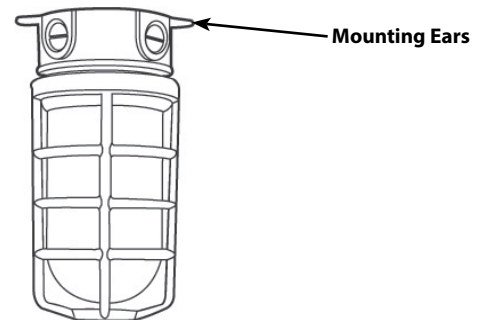

VC Ceiling



Adapter Plate (VC Fixtures Only)



## LAMP INSTALLATION

**CAUTION: Prior to installing, check that the lamp is the correct wattage. Observe lamp manufacturer's recommendations on lamp operation, ballast type and burning positions.**

1. Disconnect power. Make sure fixture and lamp are cool enough to touch.
2. Open fixture by unscrewing guard and globe from fixture.
3. Fully insert the lamp into the socket.
4. Replace globe and guard.

# VX/VC/VLX CEILING FIXTURES INSTALLATION INSTRUCTIONS




Thank you for buying RAB lighting fixtures. Our goal is to design the best quality products to get the job done right. We'd like to hear your comments. Call the Marketing Department at 888-RAB-1000 or email: [marketing@rabweb.com](mailto:marketing@rabweb.com)

## WIRING

Use supply wire rated for 90°C. The units are 120V only.

1. Connect the black fixture lead to the (+) LINE supply lead.
2. Connect the white fixture lead to the (-) COMMON supply lead.
3. Connect the Ground wire from fixture to supply ground.

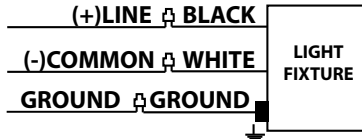

## ACCESSORIES

### Guards

<b>Die Cast Guard:</b>	GD100DG GD200DG
<b>Wire Clamp Flat Bottom:</b>	GD100BAR GD200BAR
<b>Wire Clamp Round Bottom:</b>	GD100CL GD200CL

### Globes

Glass Round Bottom globes and Polycarbonate Prismatic globes are available in colors of Opal, Ruby, Blue, Green or Amber.

<b>Globe Glass Clear:</b>	GL100 GL200
<b>Globe Glass Opal:</b>	GL100W GL200W

## CLEANING & MAINTENANCE

**CAUTION:** Be sure fixture temperature is cool enough to touch. Do not clean or maintain while fixture is energized.

1. Clean glass lens with non-abrasive glass cleaning solution.
2. As lamps age, light output diminishes. Mass re-lamping at regular intervals ensures full light output at the highest efficiency.

Note: These instructions do not cover all details or variations in equipment nor do they provide for every possible situation during installation, operation or maintenance.

## REPLACEMENT LAMPS

<u>Wattage</u>	<u>RAB Lamp Catalog#</u>
----------------	--------------------------

### Compact Fluorescent Lamp

13	LPLF13Q
22	LPLF22Q

<u>Max. Wattage</u>	<u>Globe Type</u>
---------------------	-------------------

### 100 Series (Incandescent) - VX 4" Box

75	Permaglobe
100	Colored Glass
150	Clear Glass

### 200 Series (Incandescent) - VX 4" Box

100	Permaglobe
200	Colored Glass
300	Clear Glass

### 100 Series (Incandescent) - VC Ceiling

75	Permaglobe
100	Colored Glass
100	Clear Glass

### 200 Series (Incandescent) - VC Ceiling

100	Permaglobe
100	Colored Glass
150	Clear Glass

### 100 Series (Incandescent) - VLX 3" Box

75	Permaglobe
100	Colored Glass
150	Clear Glass

### 200 Series (Incandescent) - VLX 3" Box

100	Permaglobe
150	Colored Glass
200	Clear Glass

## TROUBLESHOOTING

1. Is the proper lamp installed?
2. Make sure the lamp is not defective. Try a lamp known to be in operating condition.
3. Check that the line voltage at fixture is correct. Refer to wiring directions.
4. Is there voltage at the lamp socket? If there is no voltage, check all connections.
5. Is the fixture grounded properly?