



Color: Bronze

Weight: 9.5 lbs

| | |
|---------------------|--------------|
| Project: | Type: |
| Prepared By: | Date: |

| Driver Info | | LED Info | |
|-------------|------------|--------------|-------------------|
| Type | Constant | Watts | 60/50/40/30W |
| 120V | N/A | Color Temp | 3000K/4000K/5000K |
| 208V | N/A | Color | 82-85 CRI |
| 240V | N/A | Accuracy | |
| 277V | N/A | L70 Lifespan | 100,000 Hours |
| Input Watts | 28.6-62.1W | Lumens | 3,572-9,211 lm |
| | | Efficacy | 116.5-160 lm/W |

Technical Specifications

Field Adjustability

Cutoff Adjustability:

45°, 30°, 15° and 0° (factory default 45°)

Field Adjustable:

Field Adjustable Light Output:

60W/50W/40W/30W (factory default 60W)

Color temperature selectable 3000K, 4000K and 5000K (factory default 4000K)

Compliance

UL Listed:

Suitable for wet locations

DLC Listed:

This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

DLC Product Code: S-GB8H9H

Electrical

Driver:

Constant Current, Class 1, 480V, 50/60 Hz:

60W: 480V: 0.14A

50W: 480V: 0.12A

40W: 480V: 0.10A

30W: 480V: 0.08A

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

Photocell:

Integrated photocell included with on/off switch

Surge Protection:

DM 4KV+ CM 6KV

Performance

Lifespan:

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

Performance Data:

[Click here for the W22-M-60/480 performance data](#)

Wattage Equivalency:

60W: Replaces up to 250W Metal Halide (MH) or 200W High Pressure Sodium (HPS)

50W: Replaces up to 250W Metal Halide (MH) or 200W High Pressure Sodium (HPS)

40W: Replaces up to 175W Metal Halide (MH) or 150W High Pressure Sodium (HPS)

30W: Replaces up to 150W Metal Halide (MH) or 100W High Pressure Sodium (HPS)

LED Characteristics

LEDs:

Long-life, high-efficacy, surface-mount LEDs

Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

Construction

Housing:

Die-cast aluminum

Mounting:

Surface mount for recessed junction box; 3 conduit entry points

Lens:

Glass

Reflector:

Aluminum

Cold Weather Starting:

The minimum starting temperature is -40°C (-40°F)

Maximum Ambient Temperature:

Suitable for use in up to 40°C (104°F)

Technical Specifications (continued)

Green Technology:

Mercury and UV free. RoHS-compliant components.

Finish:

Formulated for high durability and long-lasting color

Optical

BUG Rating:

60W: B2 U4 G5

50W: B2 U4 G4

40W: B1 U3 G4

30W: B1 U3 G3

Other

5 Yr Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.


Note:

All values are typical (tolerance +/- 10%)

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

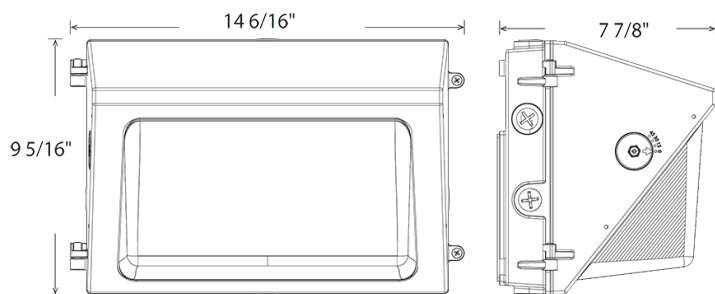

Features

- 100,000-Hour LED lifespan
- 0-10V dimming standard
- 5-Year, limited warranty

Ordering Matrix

| Family | Housing Size | Wattage | Color Temp | Finish | Forward Throw | Voltage | Options |
|--------|--------------------------------------|--|---|--------------------------------|--|------------------------------------|---|
| W22 | M | 60 | | | | /480 | |
| | S = Small M = Medium L = Large | 30 = 30/25/20/15W 60 = 60/50/40/30W 100 = 100/85/70/50W 150 = 150/125/100/75W | Blank = 3000K/4000K/5000K Adjustable | Blank = Bronze W = White | Blank = Adjustable Throw 0°/15°/30°/45° | Blank = 120-277V /480 = 480V | Blank = Selectable Photocell /E = Selectable Photocell w/Battery Backup |