



Color: Bronze

Weight: 20.7 lbs

Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Type	Constant	Watts	320/280/240/200W
120V	2.65A	Color Temp	3000K/4000K/5000K
208V	1.58A	Color	82-83 CRI
240V	1.37A	Accuracy	
277V	1.20A	L70 Lifespan	100,000 Hours
Input Watts	199.8-320.7W	Lumens	29,268-45,989 lm
		Efficacy	130.8-159.3 lm/W

Technical Specifications

Field Adjustability

Optical Field Adjustability:

90°, 75° and 55°

Field Adjustable:

Field Adjustable Light Output:
320W/280W/240W/200W (factory default 320W)
Color Temperature Selectable:
3000K, 4000K and 5000K (factory default 4000K)

Compliance

UL Listed:

Suitable for wet locations

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

IP Rating:

Ingress protection rating of IP65 for dust and water

DLC Listed:

This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.
DLC Product Code: S-MDDYDH

Electrical

Driver:

320W: Constant Current, Class 1, 120-277V, 50/60Hz, 120V: 2.65A, 208V: 1.58A, 240V: 1.37A, 277V: 1.20A

280W: Constant Current, Class 1, 120-277V, 50/60Hz, 120V: 1.20A, 208V: 1.38A, 240V: 1.20A, 277V: 1.05A

240W: Constant Current, Class 1, 120-277V, 50/60Hz, 120V: 2.00A, 208V: 1.18A, 240V: 1.03A, 277V: 0.90A

200W: Constant Current, Class 1, 120-277V, 50/60Hz, 120V: 1.67A, 208V: 0.98A, 240V: 0.85A, 277V: 0.74A

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

THD:

10.32% at 120V, 7.94% at 277V

Power Factor:

99.4% at 120V, 95.2% at 277V

Surge Protection:

L/N-PE: 2.5kV, L-N: 2.5kV

Photocell:

Integrated photocell included with on/off switch

LED Characteristics

LEDs:

Long-life, high-efficacy, surface-mount LEDs

Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

Color Consistency:

3000K & 5000K: 5-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color
4000K: 7-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

Performance

Lifespan:

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

Performance Data:

[Click here for the X22-320 performance data](#)

Technical Specifications (continued)

Wattage Equivalency:

320W: Replaces up to 1000W Metal Halide (MH) or 1000W High Pressure Sodium (HPS)

280W: Replaces up to 1000W Metal Halide (MH) or 750W High Pressure Sodium (HPS)

240W: Replaces up to 1000W Metal Halide (MH) or 750W High Pressure Sodium (HPS)

200W: Replaces up to 750W Metal Halide (MH) or 600W High Pressure Sodium

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Construction**Cold Weather Starting:**

The minimum starting temperature is -30°C (-22°F)

Maximum Ambient Temperature:

Suitable for use in up to 50°C (122°F)

Housing:

Die-cast aluminum

Mounting:

Robust knuckle mount with 180° adjustable swivel arm. Tilt angle in 10° increments. Yoke kit is included.

Lens:

Tempered glass

Effective Projected Area:

1 Fixture: 0.759 ft²

2 Fixtures at 90°: 1.985 ft²

2 Fixtures at 180°: 1.517 ft²

3 Fixtures at 90°: 2.744 ft²

4 Fixtures at 90°: 2.744 ft²

Finish:

Formulated for high durability and long-lasting color

Green Technology:

Mercury and UV free. RoHS-compliant components.


Other**Note:**

All values are typical (tolerance +/- 10%)

5 Yr Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Dimensions

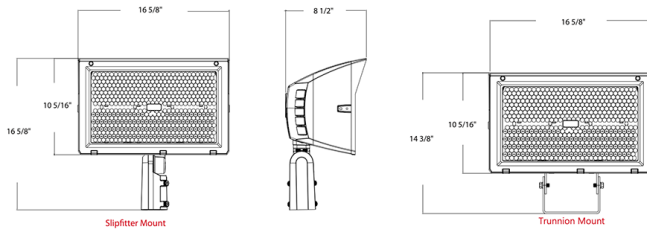

Features

- DLC Premium listed
- IP65 Rated
- 100,000-Hour LED lifespan
- 5-Year, limited warranty

Ordering Matrix

Family	Wattage	Color Temp	Mounting	Finish	Beam Angle	Voltage	Options
X22	-	320	Blank				
	35 = 35/30/25/20W 60 = 60/50/40/30W 80 = 80/70/60/50W 150 = 150/125/100/75W 250 = 250/220/190/160W 320 = 320/280/240/200W 420 = 420/380/340/300W 500 = 500/450/420/380W 20 = 20/17/13/10W	Blank = 3000K/4000K/5000K CCT Adjustable	Blank = Knuckle Mount Installed with Yoke Kit Included Blank = Knuckle Mount Installed with Trunnion Kit Included Blank = Slipfitter Mount Installed with Trunnion Kit Included	Blank = Bronze W = White	Blank = Selectable Beam Angle (Medium to Very Wide Flood 55-100°)	Blank = 120-277V /480 = 480V, 0-10V Dimming	Blank = Selectable On/Off Photocell

*X22-20 & X22-35: Knuckle mount installed with yoke mount included.
 X22-60 & X22-80: Knuckle mount installed with trunnion mount included.
 X22-150-500: Slipfitter mount installed with trunnion mount included. 480V only available in 150W-500W.*